

FULL EXTENSION SOFT-CLOSE SLIDE ESR4670 Stainless steel

LOAD CAPACITY 157~343 N

L=R

DETACH

HOLD CLOSED




CATCH

INSTRUCTION

SUS



● Slide cross section S=1/1

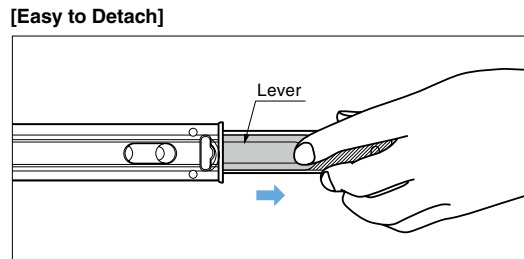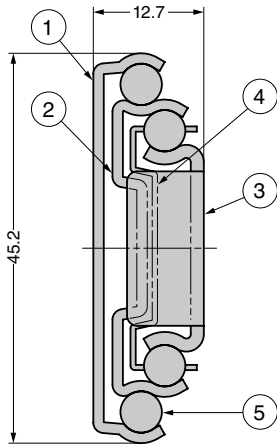


The drawer can be detached by pulling the lever in the direction of the arrow.

[Remarks]

- Be sure to read the "Cautions" 1.
- Some parts of this product are made of plastic.
- Do not push with a strong force when soft-closing mechanism is operating. Otherwise, it may cause oil leakage.

[Recommended Screws]

- For metal: M4 screw (except for countersunk head)
- For wood: M4 tapping screw (except for countersunk head)

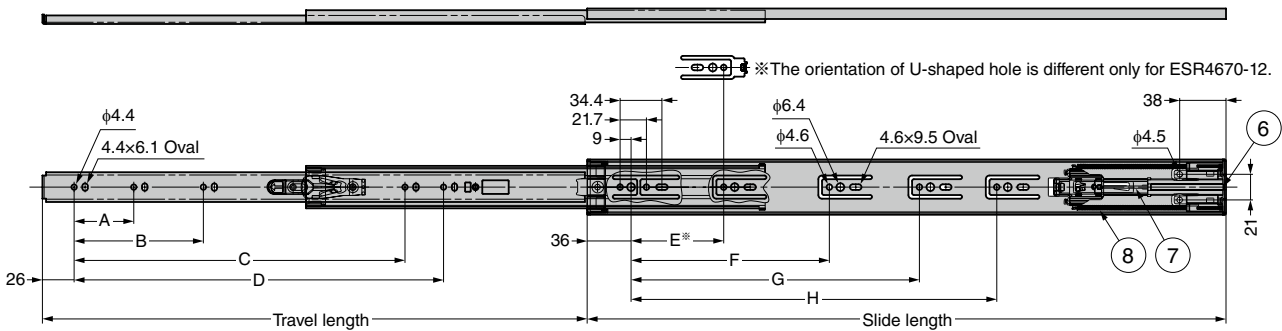

No.	Part Name	Material
①	Outer Member	Stainless Steel (SUS304)
②	Intermediate Member	
③	Inner Member	
④	Retainer	
⑤	Balls	
⑥	Damper Case	POM
⑦	Shaft	Stainless Steel (SUS303)
⑧	Spring	Stainless Steel (SUS304)

Sold in pairs (2 pcs).

RoHS	CAD	Item Code	Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	H	Load Capacity N/pair	Load Capacity kgf/pair	Weight (kg/pair)	Box (pairs)	Carton (pairs)
✓	3D	190-033-964	ESR4670-12	300	265	-	-	-	174	145	-	-	-	157	16	0.78	10	-
✓	3D	190-033-965	ESR4670-14	350	340	-	-	-	224	151	-	-	-	196	20	1.07	10	-
✓	3D	190-033-966	ESR4670-16	400	400	96	-	-	256	167	-	-	-	294	30	1.21	10	-
✓	3D	190-033-967	ESR4670-18	450	450	128	-	-	306	-	215	-	-	343	35	1.36	10	-
✓	3D	190-033-968	ESR4670-20	500	500	96	160	-	344	119	279	-	1.46			10	-	
✓	3D	190-033-969	ESR4670-22	550	550	96	160	-	394	119	215	311	1.66			10	-	
✓	3D	190-033-970	ESR4670-24	600	600	128	192	-	444	119	247	375	1.81			10	-	
✓	3D	190-033-971	ESR4670-26	650	650	128	224	416	494	119	215	311	407			1.96	10	-
✓	3D	190-033-972	ESR4670-28	700	700	128	224	480	544	119	215	343	471	1.96	10	-		

Refer to 1 : No.280 P.399