

## FULL EXTENSION SOFT-CLOSE SLIDE 3670 Black Finish

INSTRUCTION

## Self and Soft Closing



## Smooth Black Finish



- Black version of the 3670 slide.
- Full extension (3 members).
- Slides smoothly even if cabinet is slightly deformed due to shock absorbing effect of the outer member.
- The drawer can be detached by lifting the lever.

## [Specification]

- Self and soft closing position:
  - 250-350 type: 20 mm distance from closed position
  - 400-600 type: 36 mm distance from closed position
- The maximum width of the drawer is the slide length + 200mm.


## [Remarks]

- Do not push with a strong force to prevent oil leakage when soft-closing mechanism is in operation.
- Scratches on black surface may become conspicuous. Please handle it with care during installation.


## [Parts Included]

- Truss head tapping screw 4 x 12 (black chrome)



## Self and Soft Closing

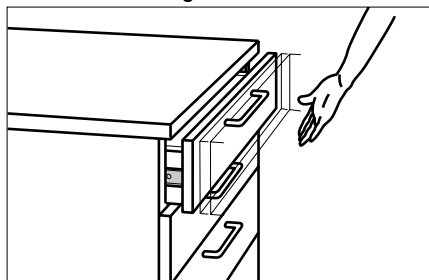

## Full Extension (3 Members)

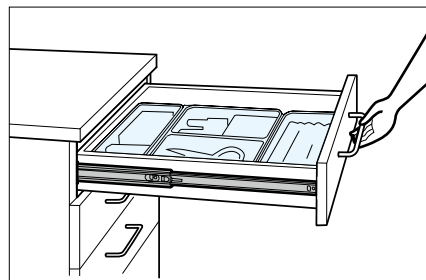

## Easy to Detach

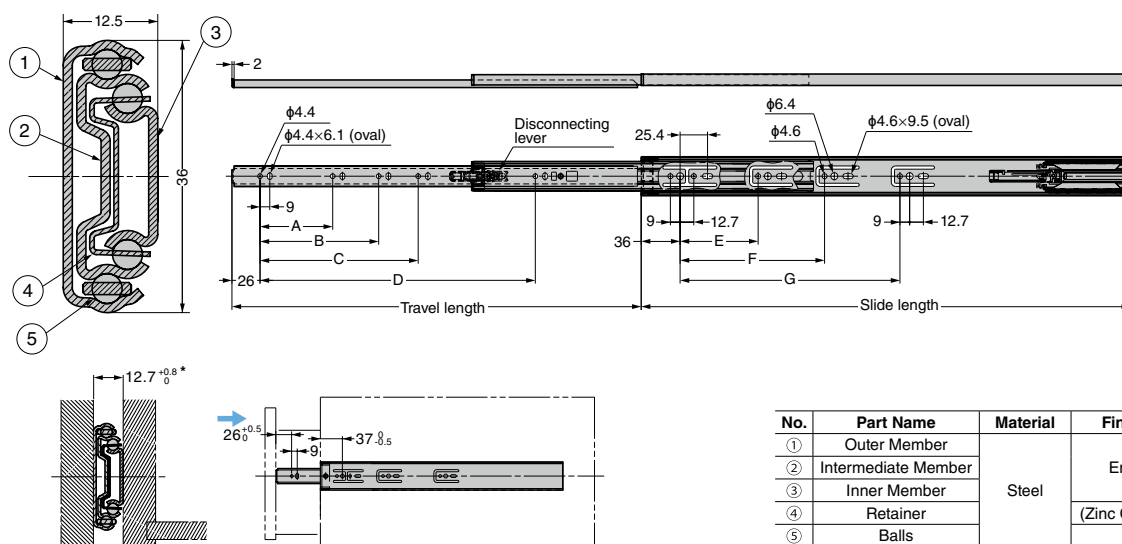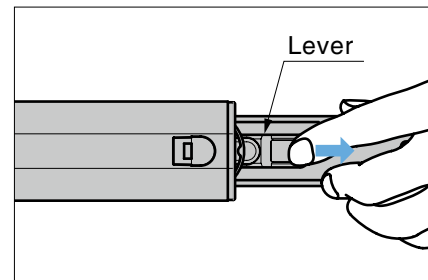

\* Clearance between the drawer and cabinet must be within the range of the allowance.

No.	Part Name	Material	Finish / Colour
①	Outer Member	Steel	Enamel Black
②	Intermediate Member		
③	Inner Member		(Zinc Chromate Steel)
④	Retainer		
⑤	Balls		-

Sold in pairs (2 pcs)

RoHS	CAD	Item Code	Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	Load Capacity / pair		Weight / pair (g)	Box (set)
-	●	190-048-809	3670-250BL	250	200	124	-	-	-	87	-	-	147	15	540	20
-	●	190-048-810	3670-300BL	300	300	174	-	-	-	-	-	-			660	20
-	●	190-048-811	3670-350BL	350	350	96	224	-	-	-	183	-	196	20	780	10
-	●	190-048-812	3670-400BL	400	400	160	256	-	-	-	199	-			900	10
-	●	190-048-813	3670-450BL	450	450	96	192	306	-	119	247	-			1020	10
-	●	190-048-814	3670-500BL	500	500	-	-	356	-	-	-	295			1120	10
-	●	190-048-815	3670-550BL	550	550	128	224	352	406	-	215	343	196	20	1240	10
-	●	190-048-816	3670-600BL	600	600			384	456	-	247	375			1380	10