

# FULL EXTENSION PUSH-TO-OPEN SLIDE 4638

**LOAD CAPACITY** 265~441 N/pair

**L=R**

**DETACH**

**HOLD OPENED**

SELF & SOFT-CLOSE SLIDES

PUSH-TO-OPEN SLIDES

MINI SLIDES

MEDIUM SIZE SLIDES (STAINLESS STEEL)

MEDIUM SIZE SLIDES (ALUMINIUM)




MEDIUM SIZE SLIDES (OTHERS)

LINEAR SLIDES

STAINLESS STEEL

ALUMINIUM

STEEL

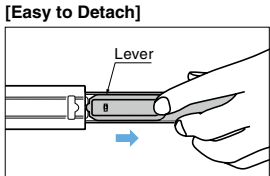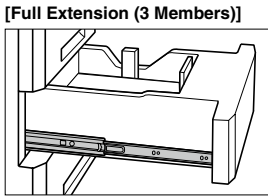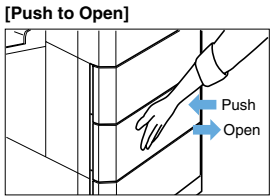

The drawer can be detached by pulling the lever in the direction of the arrow.


- Push-to-open mechanism. No handle or knobs required for a sleek, modern look.
- The drawer is easily opened by slightly pushing the front plate.
- With push-to-open mechanism built-in, easy to install as with conventional slides.
- Full extension (3 members).
- The drawer can be held in fully opened position. Release by pressing the front plate.
- The drawer is detachable by lifting the lever.
- High load capacity due to sequential mechanism.

**[Remarks]**



- Be sure to read the "Cautions" 1.
- When the drawer is closed, pressing the front plate may unexpectedly open the drawer.
- Do not apply strong shock. Otherwise, the drawer may be opened unexpectedly.
- Do not pull the drawer strongly in closed position. Otherwise, the slide may be damaged.

**[Recommended Screws]**



- M4 round head screw, nominal 4 or M4 binding head screw, nominal 4 or M4 truss head screw.

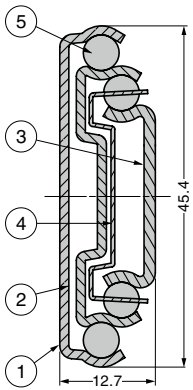

S=1/1

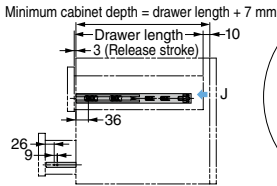

Push effective area (area where the push-to-open mechanism works)

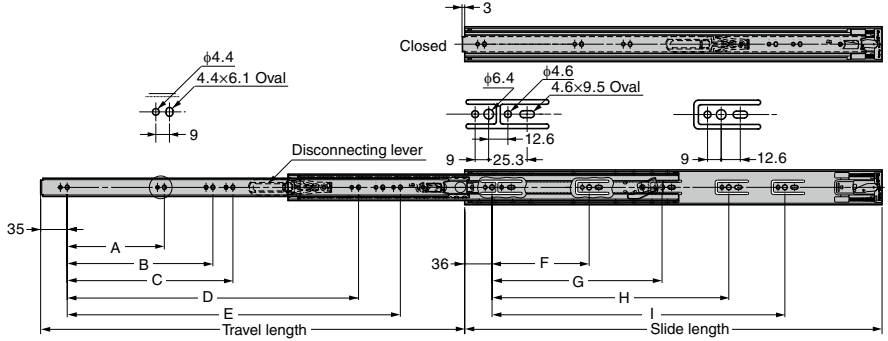

No.	Part Name	Material	Finish
①	Outer Member	Steel	Clear Zinc Chromate
②	Intermediate Member		
③	Inner Member		
④	Retainer		
⑤	Balls		

Sold in pairs (2 pcs).

Rt/S	CAD	Item Code	Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	H	I	Max. Drawer Length		Load Capacity N/pair	Load Capacity kgf/pair	Weight (kg/pair)	Box (pairs)	Carton (pairs)
															W	K					
☑	☑	190-012-468	4638-14	350	356	-	-	-	224	128	-	-	224	550	215	441	45	1	1.14	20	-
☑	☑	190-012-469	4638-16	400	406	-	-	-	288	-	256	-	320	600	250	422	43	1.14	20	-	
☑	☑	190-012-470	4638-18	450	457	-	-	-	320	-	-	320	650	280	392	40	1.28	10	-		
☑	☑	190-012-471	4638-20	500	508	-	-	-	384	-	224	352	700	310	373	38	1.42	10	-		
☑	☑	190-012-472	4638-22	550	559	-	-	-	192	416	-	320	416	750	340	353	36	1.56	10	-	
☑	☑	190-012-473	4638-24	600	610	-	-	-	480	512	128	-	448	800	375	333	34	1.7	10	-	
☑	☑	190-012-474	4638-26	650	660	-	224	-	416	512	-	352	512	850	405	304	31	1.84	10	-	
☑	☑	190-012-475	4638-28	700	711	-	-	448	512	576	-	-	544	900	435	265	27	1.98	10	-	

Refer to 1 : P.399