


3/4 EXTENSION SLIDE RKA5

LOAD CAPACITY 147 N/pair

DETACH

CATCH

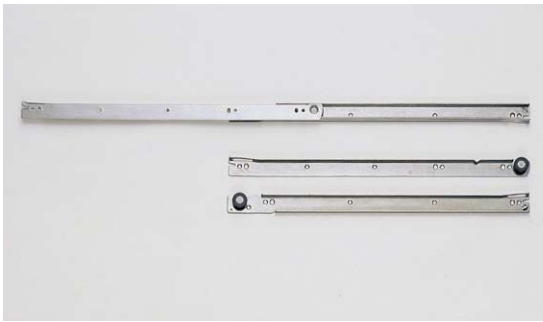

- 3/4 extension (2 members).
- R-shaped (inclined) slide ends allow complete closing.
- Urethane roller provides silent and smooth movement.
- Reduced in left and right backlash of the drawer.

[Remarks]

- Be sure to read the "Cautions" 1.

[Recommended Screws]

- M3/M3.5 countersunk head tapping screw or M3/M3.5 countersunk head screw

SELF & SOFT-CLOSE SLIDES

PUSH-TO-OPEN SLIDES

MINI SLIDES

MEDIUM SIZE SLIDES (STAINLESS STEEL)

MEDIUM SIZE SLIDES (ALUMINIUM)


MEDIUM SIZE SLIDES (OTHERS)

LINEAR SLIDES


STAINLESS STEEL

ALUMINIUM

STEEL

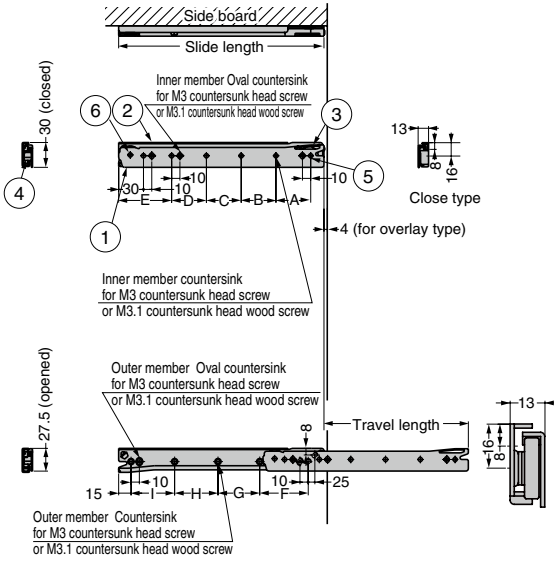


[Application Example]



Dimension marked with ※ is that required for drawer attaching/detaching.

[Installing to Metal]



No.	Part Name	Material	Finish/Colour
①	Inner Member	Stainless Steel (SUS430)	-
②	Outer Member		-
③	Roller	PUR/POM	Black/White
④	Rail Guide	POM	White
⑤	Roller Washer	Stainless Steel (SUS430)	-
⑥	Shaft		-

Sold in pairs (2 pcs).

RnS	CAD	Item Code	Item Name	Slide Length	Travel Length	Inner Member						Outer Member					Load Capacity N/pair	Load Capacity kg/pair	Weight (kg/pair)	Box (pairs)	Carton (pairs)
						A	B	C	D	E	Holes	F	G	H	I	Holes					
GS	SD	190-110-170	RKA5-300 (SUS430)	296	205	165	-	-	-	115	6	112.5	112.5	-	-	6	147	15	0.48	20	-
GS	SD	190-110-171	RKA5-350 (SUS430)	346	250	105	105	-	-	120	7	91.5	92	91.5	-	6			0.57	20	-
GS	SD	190-110-172	RKA5-400 (SUS430)	396	295	127.5	127.5	-	-	125	7	108.5	108	108.5	-	7			0.65	20	-
GS	SD	190-110-173	RKA5-450 (SUS430)	446	340	100	100	100	-	130	8	125	125	125	-	8			0.7	10	-
GS	SD	190-110-174	RKA5-500 (SUS430)	496	380	113	114	113	-	140	8	106	106.5	106.5	106	8			0.82	10	-
GS	SD	190-110-175	RKA5-550 (SUS430)	546	420	126.5	127	126.5	-	150	9	119	118.5	118.5	119	8			0.9	10	-
GS	SD	190-110-176	RKA5-600 (SUS430)	596	460	105	105	105	105	160	9	131.5	131	131	131.5	8			0.98	10	-

Refer to 1 : P.399