

ALL STAINLESS STEEL DRAWER SLIDE **SNS35S-CV** Low Particle Emissions Grease TypeLatest
Information**Load capacity 245~481N/pair**

- We use low particle emissions grease (NSK Ltd. LG2), which is suitable for cleanroom environments.
- This is a stainless steel drawer slide with a height of 35.3mm.

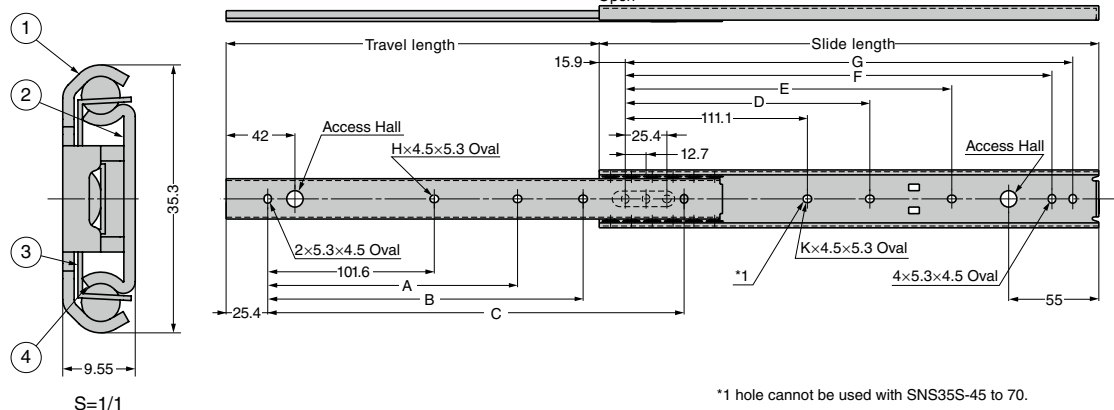
Stainless

Applications

● Cleanrooms, Semiconductor, Liquid Crystal

Recommended screws

● M4 Pan Head Screw, or Nominal 4 Pan Head Tapping Screw

Application Example

*1 hole cannot be used with SNS35S-45 to 70.
We are using low-dust grease (NSK Ltd. LG2).

No.	Part Name	Material	Finish
①	Outer member	Stainless Steel (SUS304)	Plain
②	Inner member		
③	Retainer		
④	Ball	Stainless Steel (SUS440)	—

RoHS	Item Code	Item Name	Slide length	Travel length	A	B	C	D	E	F	G	H	K	Load Capacity N/pair	Load Capacity kgf/pair	Weight g/per piece
●	190-056-278	SNS35S-30CV	304.8	228.6	—	152.4	254	—	149.2	260.3	273	2	3	481	49	310
●	190-056-279	SNS35S-35CV	355.6	279.4		203.2	304.8		200	311.1	323.8			461	47	360
●	190-056-280	SNS35S-40CV	406.4	304.8		254	355.6		250.8	361.9	374.6			422	43	410
●	190-056-281	SNS35S-45CV	457.2	330.2	203.2	304.8	406.4	212.7	301.6	412.7	425.4	3	4	402	41	460
●	190-056-282	SNS35S-50CV	508	381	228.6	355.6	457.2	238.1	352.4	463.5	476.2			363	37	510
●	190-056-283	SNS35S-55CV	558.8	406.4	254	406.4	508	263.5	403.2	514.3	527			333	34	560
●	190-056-284	SNS35S-60CV	609.6	431.8	279.4	457.2	558.8	288.9	454	565.1	577.8	3	4	294	30	610
●	190-056-285	SNS35S-65CV	660.4	482.6	304.8	508	609.6	314.3	504.8	615.9	628.6			265	27	660
●	190-056-286	SNS35S-70CV	711.2	508	330.2	558.8	660.4	339.7	555.6	666.7	679.4			245	25	710