

## TURNBUCKLE DFTB-311EE Eye and Eye Type

 Latest  
Info


- Made from highly corrosion-resistant SUS316, designed for high-load applications.
- Rotate the bolts to loosen or tighten.
- Adjust the bolts at both ends by the same amount.


SUS

### Application

- Chain and wire rope connectors

### Remarks

- Be sure to read the "Cautions regarding shackles, carabiners, and ring catches".

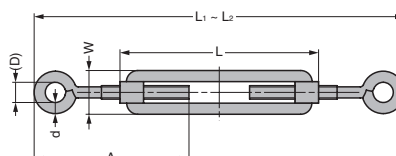

| RoHS | Item Code   | Item Name     | Material                 | W  | L   | L <sub>1</sub> | L <sub>2</sub> | A   | D   | d    | Load Capacity N | Load Capacity kgf | Weight (g) |
|------|-------------|---------------|--------------------------|----|-----|----------------|----------------|-----|-----|------|-----------------|-------------------|------------|
| ●    | 110-056-131 | DFTB-311EE-4  | Stainless Steel (SUS316) | 13 | 59  | 95             | 130            | 46  | 6   | 3.3  | 570             | 59                | 23         |
| ●    | 110-056-132 | DFTB-311EE-5  |                          | 15 | 70  | 115            | 160            | 55  | 7.5 | 4.3  | 830             | 85                | 36         |
| ●    | 110-056-133 | DFTB-311EE-6  |                          | 18 | 90  | 142            | 205            | 70  | 9   | 5.2  | 1830            | 188               | 61         |
| ●    | 110-056-134 | DFTB-311EE-8  |                          | 21 | 120 | 192            | 280            | 95  | 14  | 6.7  | 2810            | 288               | 127        |
| ●    | 110-056-135 | DFTB-311EE-10 |                          | 23 | 149 | 242            | 350            | 118 | 15  | 8.5  | 3790            | 388               | 240        |
| ●    | 110-056-136 | DFTB-311EE-12 |                          | 30 | 198 | 313            | 460            | 150 | 20  | 10.5 | 5390            | 550               | 452        |

Refer to : P-F20

## TURNBUCKLE DFTB-311HH Hook and Hook Type

 Latest  
Info


- Made from highly corrosion-resistant SUS316, designed for high-load applications.
- Rotate the bolts to loosen or tighten.
- Adjust the bolts at both ends by the same amount.


SUS

### Application

- Chain and wire rope connectors

### Remarks

- Be sure to read the "Cautions regarding shackles, carabiners, and ring catches".

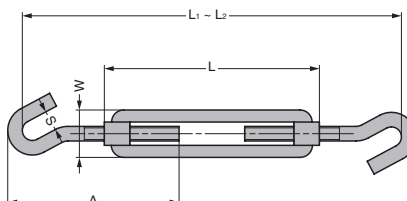

| RoHS | Item Code   | Item Name     | Material                 | W  | L   | L <sub>1</sub> | L <sub>2</sub> | A   | S   | Load Capacity N | Load Capacity kgf | Weight (g) |
|------|-------------|---------------|--------------------------|----|-----|----------------|----------------|-----|-----|-----------------|-------------------|------------|
| ●    | 110-056-125 | DFTB-311HH-4  | Stainless Steel (SUS316) | 13 | 59  | 90             | 125            | 47  | 5.5 | 110             | 13                | 23         |
| ●    | 110-056-126 | DFTB-311HH-5  |                          | 15 | 70  | 111            | 155            | 57  | 7.5 | 150             | 16                | 35         |
| ●    | 110-056-127 | DFTB-311HH-6  |                          | 18 | 90  | 138            | 200            | 70  | 8   | 420             | 44                | 59         |
| ●    | 110-056-128 | DFTB-311HH-8  |                          | 21 | 120 | 190            | 270            | 98  | 11  | 790             | 81                | 122        |
| ●    | 110-056-129 | DFTB-311HH-10 |                          | 23 | 149 | 230            | 330            | 119 | 13  | 980             | 100               | 231        |
| ●    | 110-056-130 | DFTB-311HH-12 |                          | 30 | 198 | 298            | 440            | 151 | 16  | 1710            | 175               | 439        |

Refer to : P-F20