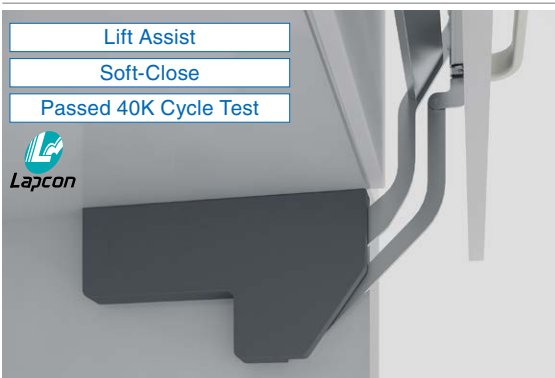


SWING LIFT UP SLUL

Latest
Information

How to Open	Item Name	Movement Features	Door Width	Door Height	Door Weight
	SLUL-8	Lift Assist Soft-Close	Max. 900	550~900	6~8kg
	SLUL-11				8~11kg

- For upward-opening flap doors.
- Soft close feature slows down closing speed and prevents slamming.
- After pulling the flap forward 120 - 150mm, a spring will help gently lift the flap.
- When installing, easily position the SLUL by aligning its front with the edge of the side panel.
- The Lift Assist strength can be adjusted to accommodate varying door weights.
- Post-installation, the door can be minutely adjusted vertically, horizontally, and angularly to correct small mounting position inaccuracies.

INSTRUCTION

Specifications

- Operating temperature: 0°C-40°C.

Parts Included

- Cross Recessed Countersunk Tapping Screw 3.5 x 45 (For Body Mounting)
- Blind head tapping screw 3.5 x 15 (for mounting plate attachment)

Sold Separately

- Body Cover SLUL-C
- Connecting Bar SLUL-B

Remarks

- Be sure to read the cautions
- 1 connecting bar SLUL-B is necessary for 1 set of SLUL.
- Attach the handle (sold separately) at the center of the door's width for optimal placement. Install it within 700mm from the top edge of the door to ensure convenient opening.

Body



Body Cover (Sold separately)



Application Example






Image of Movement

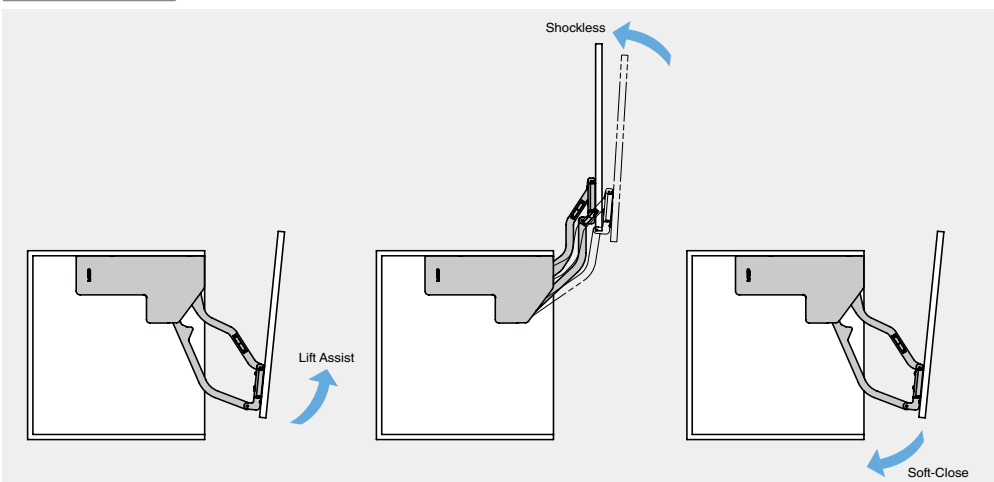


Refer to : No.400 P.293


Mounting Dimensions

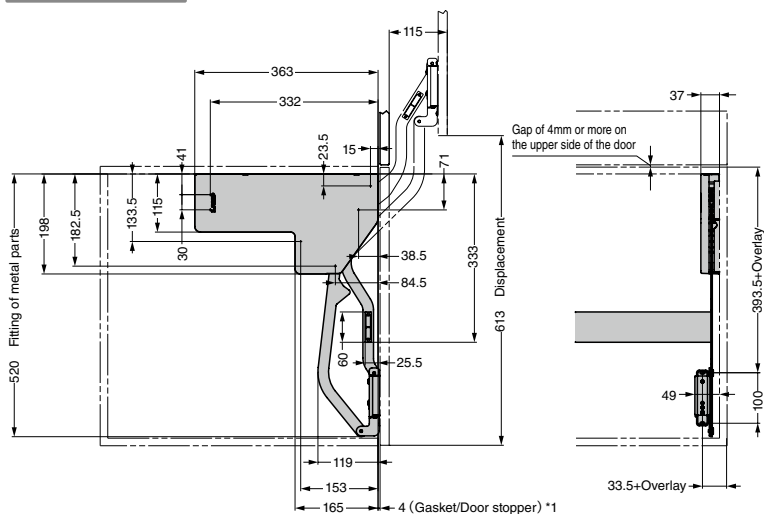

- *1: If not using a gasket/door stopper, please shift the body 4mm towards the back panel.
 *2: The maximum door protrusion when opening and closing is approximately 343mm.
 *3: Ensure there is sufficient space above the cabinet for the door to open upward. The required space is calculated as follows:
 Required Space = 613mm (door travel) + door height + 50mm (safety clearance)

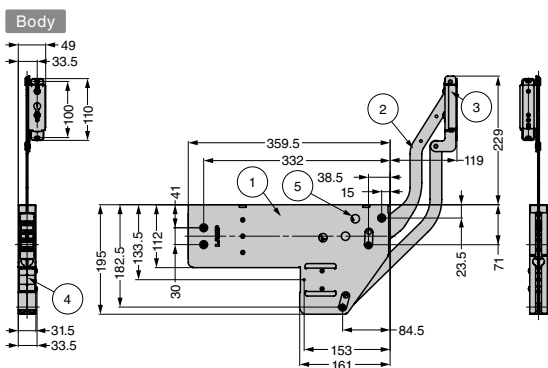


Body Cover (Sold separately)



No.	Part Name	Material	Finish/Colour
①	Body	Steel (SPCC)	Nickel
②	Arm		
③	Mounting Plate	Polyacetal (POM)	Natural
④	Damper Holder		
⑤	Adjustment Screw	Steel (SWRM)	Bright Chromate

Connecting Bar (Sold separately)



- The Connecting Bar comes in three lengths, for door widths of 600mm, 750mm, and 900mm.
 ●Use the standard length Connecting Bar when the door overlay on the side panel is 15 mm. For door overlays exceeding 15 mm, cut the Connecting Bar to length using the calculation formula provided below.

Length of the Connecting Bar = Door width - (Overlay x 2) - 35
 Or, please calculate as follows below.
 Length of the Connecting Bar = Cabinet internal width - 35

[Parts Included]

- Truss Head Tapping Screw 4.5x16 (4 pieces) for Connecting Bar Fixation

Body

This product is sold as 1 set. The order quantity is "1", which includes one piece for the left side and one for the right side.

RoHS	Item Code	Item Name	Main Material	Finish	Door Width	Door Height	Door Weight(kg)
●	180-054-943	SLUL-8	Steel	Nickel	Max. 900	550~900	6~8
●	180-054-944	SLUL-11					8~11

Body Cover (Sold separately)

This product is sold as 1 set. The order quantity is "1", which includes one piece for the left side and one for the right side.

RoHS	Item Code	Item Name	Material	Colour
●	180-054-947	SLUL-C-WT	ABS	White
●	180-054-948	SLUL-C-DGR		Dark Grey

Connecting Bar (Sold separately)

RoHS	Item Code	Item Name	Specifications	Material	Finish	Length
●	180-054-949	SLUL-B535	For Door Width 600	Aluminium Alloy	Anodised	535
●	180-054-950	SLUL-B685	For Door Width 750			685
●	180-054-951	SLUL-B835	For Door Width 900			835