

Hose sleeve

ST G3/4-AG 25 MS-V

Part no.: 10.08.03.00166

<https://www.schmalz.com/10.08.03.00166>




Homepage > Vacuum Clamping Technology > Clamping Solutions for Metal and Plastic Processing > Accessories and Spare Parts > ST G3/4-AG 25 MS-V

Hose sleeve



Thread G1: G3/4-M
Internal hose diameter: 25 mm
Material: Brass
Surface: nickel plated

Design Data

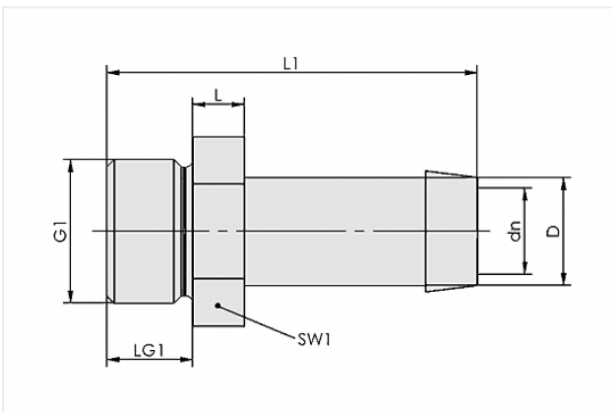

Attribute	Value
-----------	-------

dn	18.5 mm
----	---------

D	25 mm
---	-------

G1	G3/4"-M
----	---------

L	8.5 mm
---	--------

L1	60 mm
----	-------

LG1	16 mm
-----	-------

SW1	32 mm
-----	-------

Technical Data

Attribute	Value
-----------	-------

Material	Brass
----------	-------

Contact to Schmalz

J. Schmalz GmbH | Johannes-Schmalz-Straße, 72293 Glatten, Deutschland | +49 7443 2403-102 | customercenter@schmalz.de

Attribute	Value
Weight	146.9 g

Accessories



VSL 33-25 PVC-DS

Part no. 10.07.09.00041

Hose for vacuum and compressed-air systems

External diameter D: 33 mm

Internal diameter d: 25 mm

Length (max): 50 m

Material: PVC, with wire spiral

Installation radius (min): 95 mm

Pressure range (operating pressure):

-0.85 ... 4.00 bar

Ambient temperature: -20 ... 70 °C



VSL 33-25 PU-DS

Part no. 10.07.09.00051

Hose for vacuum and compressed-air systems

External diameter D: 33 mm

Internal diameter d: 25 mm

Length (max): 10 m

Material: PU, with wire spiral

Installation radius (min): 75 mm

Pressure range (operating pressure):

-0.95 ... 4.00 bar

Ambient temperature: -40 ... 90 °C