


PROPRIETY ITEM - EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING.
INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS
PATENT AND OTHERWISE ARE RESERVED BY SOUTHCO, INC.

REVISION RECORD

SYMB	DESCRIPTION	BY	DATE
A	RELEASE FOR PRODUCTION	EV/JM	27MAR2007
B	PRN: P2007-1288	EV/MJS	22OCT2007

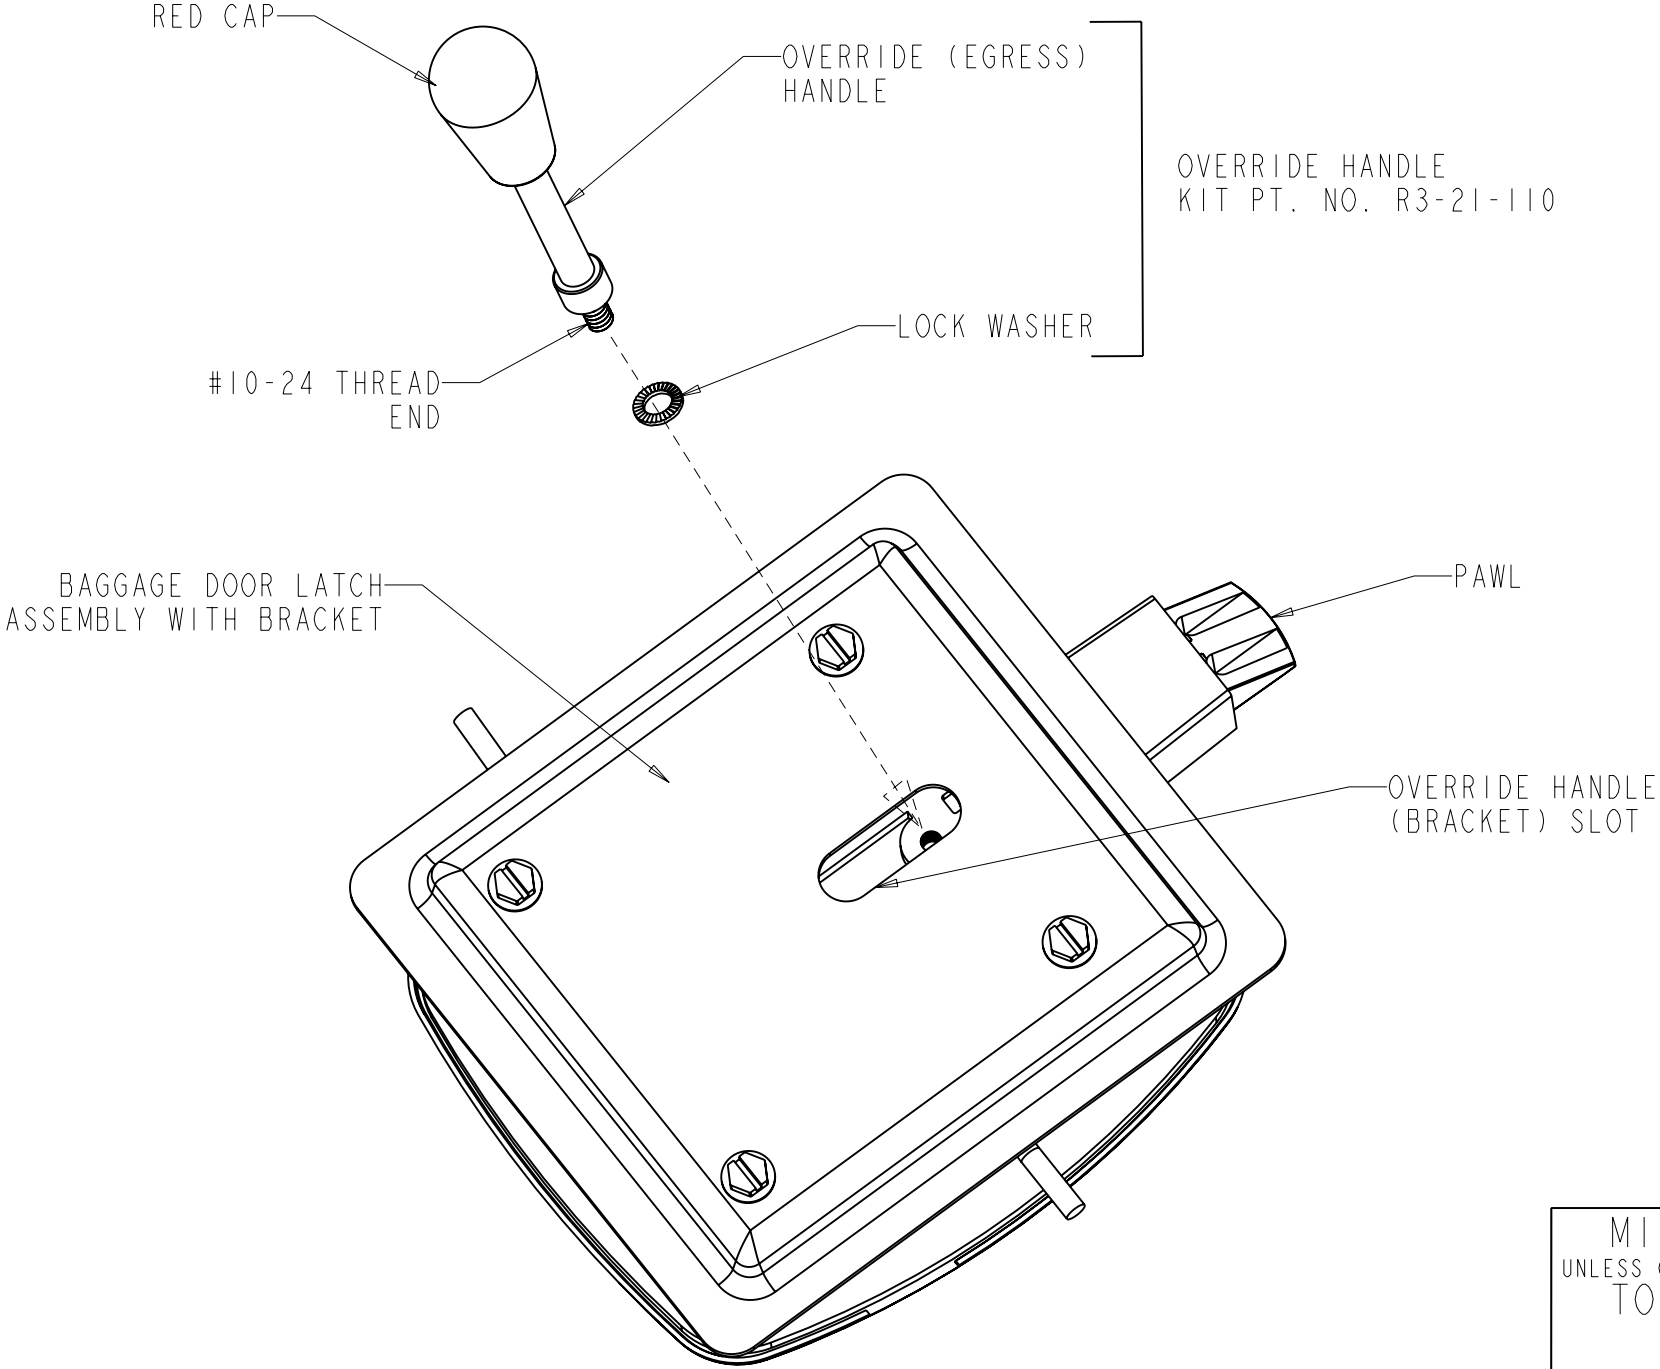

- NOTE:
1. THE OVERRIDE (EGRESS) HANDLE AND LOCK WASHER IS A PRE-BAGGED KIT ORDERED SEPARATELY, PART NO. R3-21-110.
 2. MOUNTING INSTRUCTION: OPEN THE PLASTIC BAG, INSERT THE LOCK WASHER ON THE HANDLE THREADED END. INSERT THE HANDLE WITH WASHER THROUGH THE SLOT ON THE MOUNTING BRACKET AND SCREW ON THE HANDLE INTO THE PAWL #10-24 THREADED HOLE UNTIL SNUGGED. RECOMMENDED TORQUE 1.5 Nm (13.3 lbf-in). TEST THE WORKING HANDLE BY PUSHING IT UP AND DOWN MAKING SURE THE PAWL GET ACTIVATED.

SCALE 0.750

MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES: ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY		southco®		TITLE OVERRIDE HANDLE, R3 BDL	
		DESIGNER EV 3/08/07	DRAFTER	DWG No J-R3-20-3-6	REVISION B
		MODEL NAME R3-23-260	SCALE 0.500	MATERIAL	
		© 	3.2  ALL SURFACES EXCEPT AS NOTED	CALC. WEIGHT/VOL.	FORMAT B