






NOTES:

- A. INSTALLATION INSTRUCTIONS:
1. DRILL OR PUNCH INSTALLATION HOLE.
 2. PLACE FERRULE INTO INSTALLATION HOLE.
 3. PROVIDE SOLID BACK-UP BEHIND HEAD
 4. PRESS ON HEAD OF STUD UNTIL SHOULDER OF FERRULE IS FIRMLY AGAINST OUTER PANEL AND FLARE WITH 47-110. RECOMMENDED INSTALLATION LOAD OF 2,000 N.
 5. PUNCH CANNOT TOUCH PLASTIC DURING INSTALLATION.
- B. MATERIAL AND FINISH:
- END CAP: STEEL, ZINC PLATE PLUS SEALER.
- FERRULE: ALUMINUM, NATURAL
- SPRING: STAINLESS STEEL, PASSIVATED (NOT SHOWN)
- STUD: HARDENED STEEL, ZINC PLATE PLUS SEALER.
- KNOB: PC/ABS UL94 V0 RATED, FLAME RETARDANT; TRIARYLPHOSPHATE (DOES NOT CONTAIN BROMINATED, CHLORINATED, OR HALOGENATED ADDITIVES).
- C. PARTS SHIPPED BULK.
- D. RoHS COMPLIANT.

REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
B	03NOV2015	MAL/JQ	PRN: P2015-2208




SCALE 1:1

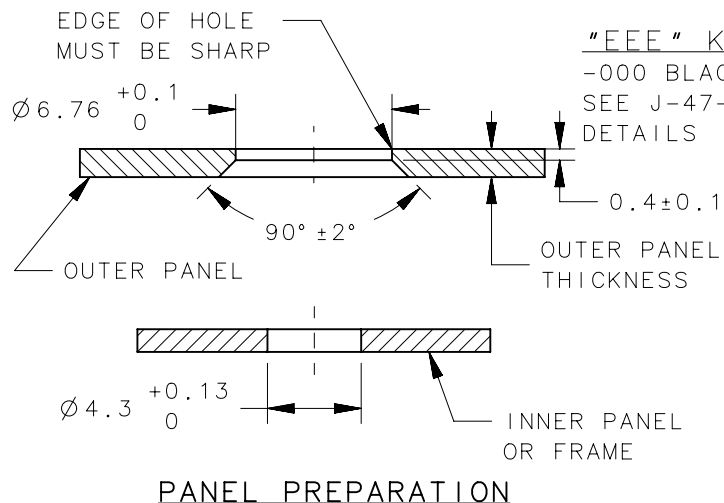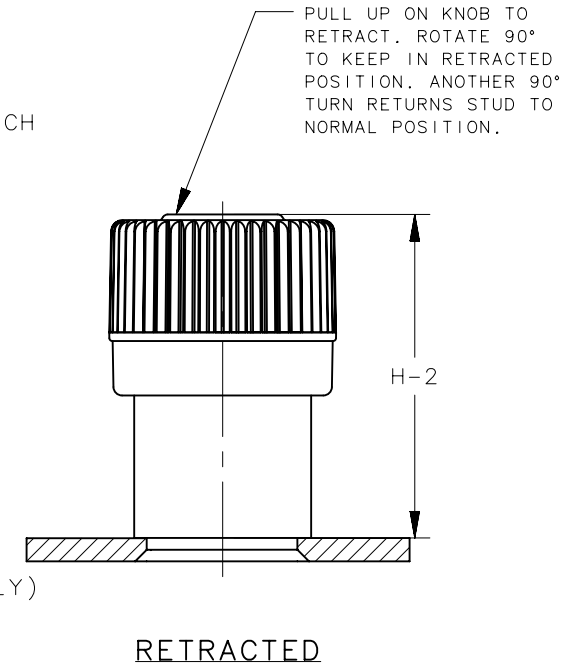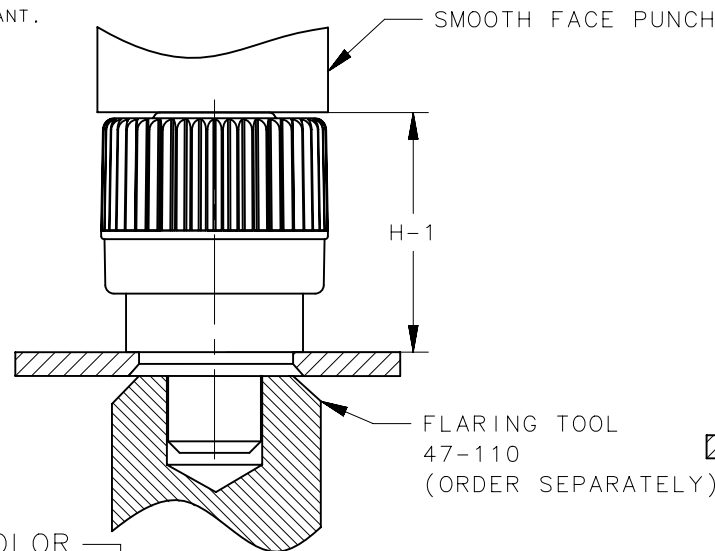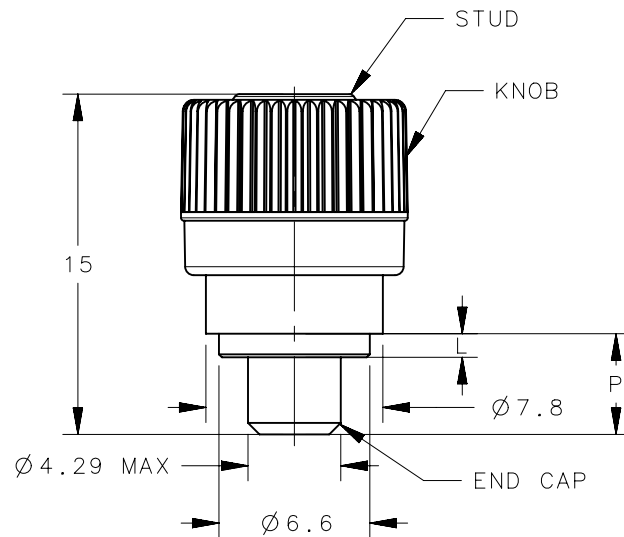

"EEE" KNOB COLOR
-000 BLACK
SEE J-47-0-3 FOR
DETAILS

RELEASED

56-321-2-EEE	1.5	2.3	5.2	1.8	9.8	13.5
56-321-1-EEE	0.8	1.5	4.4	1.0	10.6	14.3
PART NUMBER	OUTER PANEL MIN	OUTER PANEL MAX	P	L	H-1	H-2

	THIRD ANGLE PROJECTION		southco® CONNECT • CREATE • INNOVATE			
	MILLIMETERS [IN]					
	TOLERANCES UNLESS OTHERWISE NOTED		DESCRIPTION			
SURFACE AREA	ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.		56 MINI PLUNGER FLARE-IN, 4C KNOB OVERMOLD, STAY OPEN			
SIZE A4			SYSTEM NX	DWG NO. J-56-321-EEE		
VOLUME						
PROPRIETARY ITEM EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE ARE RESERVED BY SOUTHCO, INC.	PER ASME Y14.5M-1994		DRAWN BY MAL/JQ	DATE 06JUL2015	SCALE 3:1	SHEET 1 OF 1