


NOTES:



1. ALL COMPONENTS ARE RoHS COMPLIANT.
2. COSMETIC SPECIFICATIONS:

ALL POWDERCOATED SURFACES ARE TO CONFORM TO A CLASS "B" DESIGNATION AS DESCRIBED IN SOUTHCO COSMETIC SPECIFICATION: S-121-03 FOR POWDER COATING. ALL STAINLESS STEEL PARTS ARE TO CONFORM TO A CLASS "D" DESIGNATION AS DESCRIBED IN SOUTHCO COSMETIC SPECIFICATION: S-121-05 FOR STAINLESS STEEL PARTS.
3. MAXIMUM TORQUE ON MOUNTING SCREWS: 2.5 N-m.

REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
B	17APR2015	RL/LC	PRN: P2015-0662

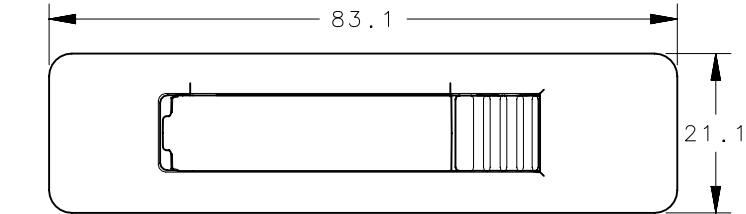


LATCH CLOSED

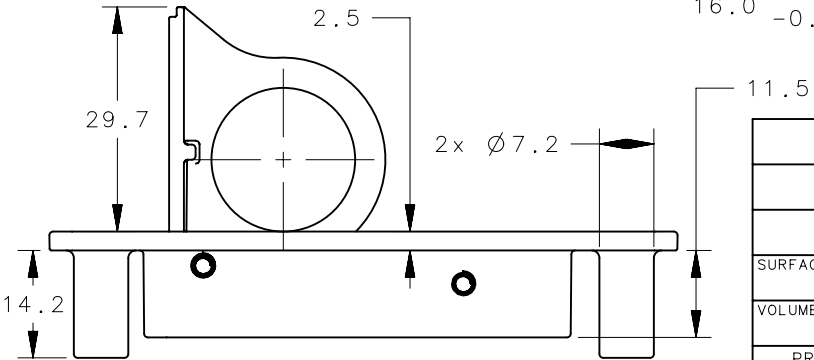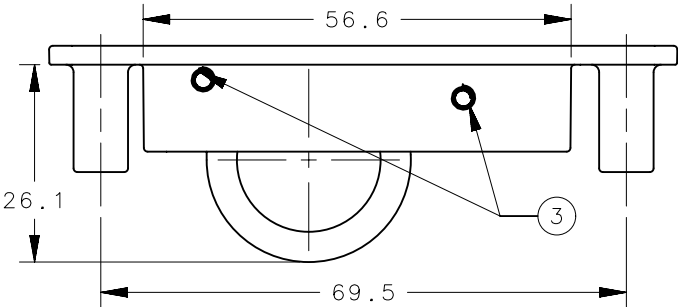

LATCH OPEN

PANEL PREPARATION

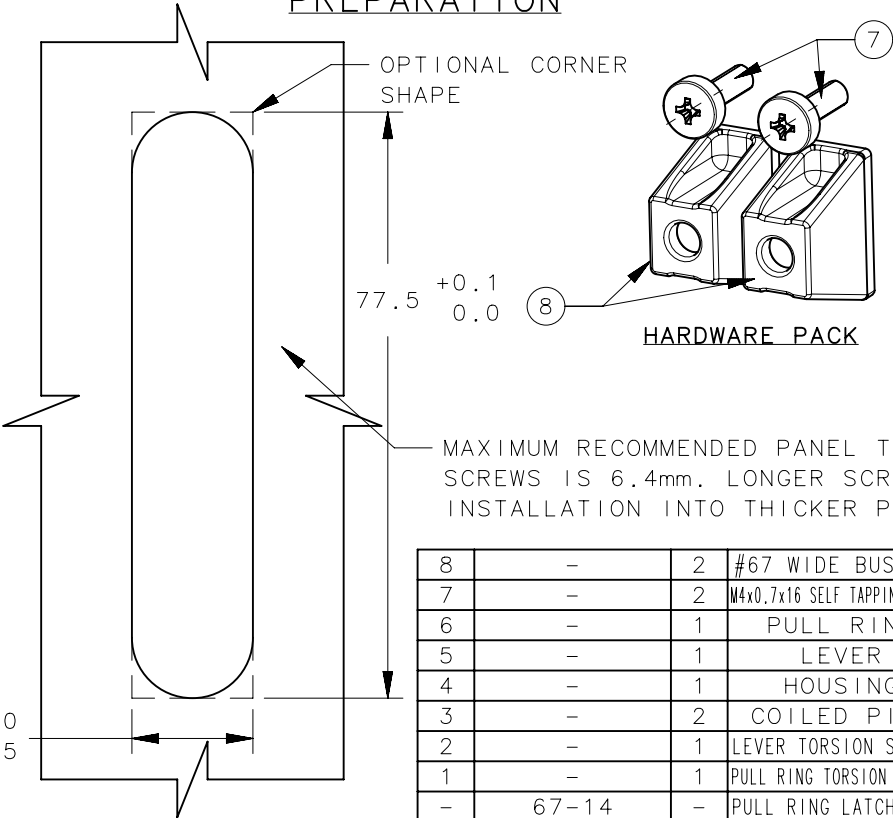

MAXIMUM RECOMMENDED PANEL THICKNESS WITH SUPPLIED SCREWS IS 6.4mm. LONGER SCREWS WILL BE NEEDED FOR INSTALLATION INTO THICKER PANELS.

8	-	2	#67 WIDE BUSHING	POM HOMOPOLYMER	BLACK
7	-	2	M4x0.7x16 SELF TAPPING SCREW	STEEL	ZINC NICKEL PLATING
6	-	1	PULL RING	ZAMAC 3	SILVER POWDERCOATING
5	-	1	LEVER	ZAMAC 3	SILVER POWDERCOATING
4	-	1	HOUSING	ZAMAC 3	SILVER POWDERCOATING
3	-	2	COILED PINS	STAINLESS	PASSIVATED
2	-	1	LEVER TORSION SPRING	STAINLESS	PASSIVATED
1	-	1	PULL RING TORSION SPRING	STAINLESS	PASSIVATED
-	67-14	-	PULL RING LATCH ASSY	-	-
NO.	PART NUMBER	QTY	TYPE OF COMPONENT	MATERIAL	FINISH

THIRD ANGLE PROJECTION

MILLIMETERS [IN]

TOLERANCES UNLESS OTHERWISE NOTED

ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.

PER ASME Y14.5M-1994

surface area

VOLUME

PROPRIETARY ITEM

EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.

SIZE

A4

SYSTEM

NX

DWG NO.

J-67-14

DRAWN BY

RL/LC

DATE

27OCT2014

SCALE

1:1

SHEET

1 OF 1

southco®

CONNECT • CREATE • INNOVATE

PULL RING LATCH, STANDARD