


southco®PROPRIETARY ITEM - EXCEPT FOR USES EXPRESSLY
GRANTED IN WRITING INFORMATION DISCLOSED
HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT
AND OTHERWISE ARE RESERVED BY SOUTHCO, INC.

ADJUSTABLE TENSION LATCH

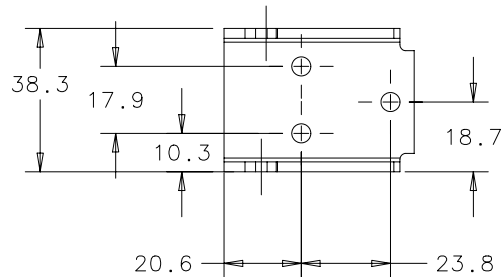
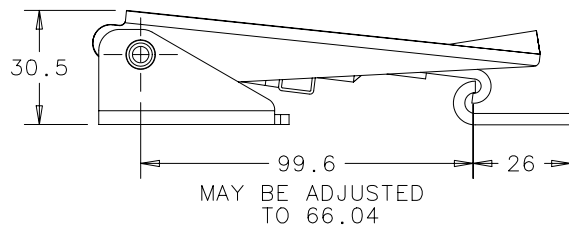
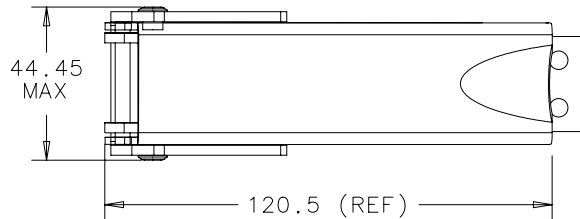
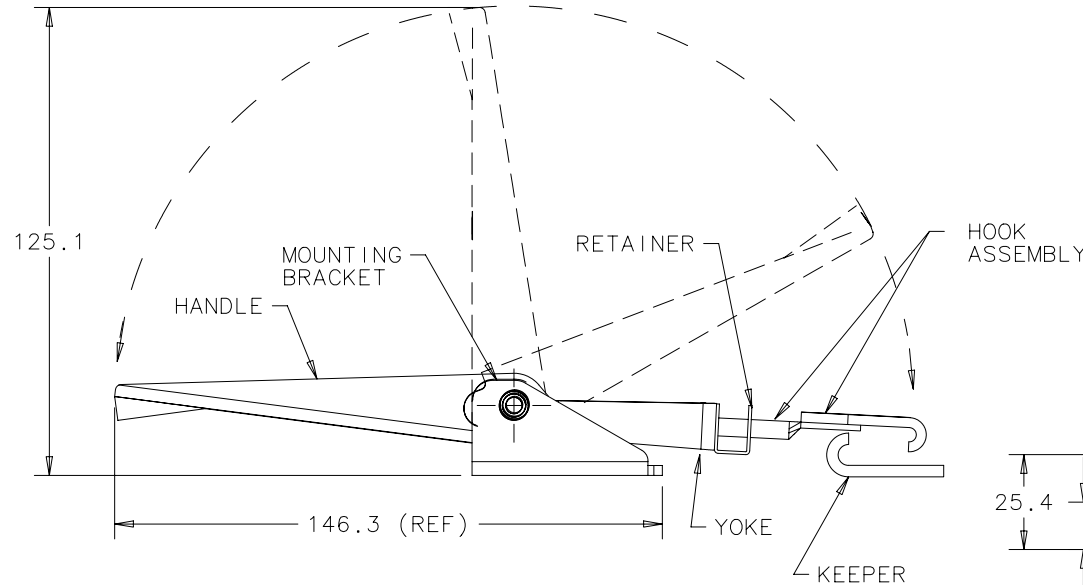
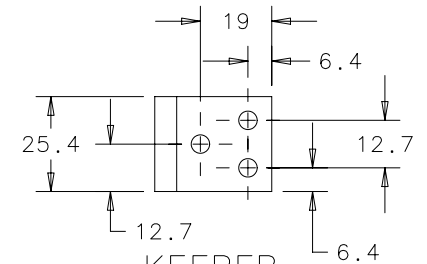
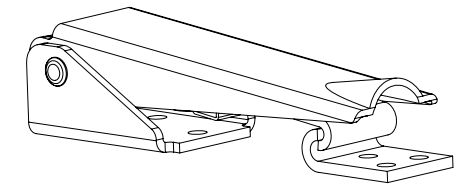
DATE	DRAWN	CHKD	SCALE	DRAWING NUMBER
05FEB2009	MJS	MJS	.5:1	J-91-812-52

REV	DATE	DRAWN/CHKD	DESCRIPTION	ITEM	PART NUMBER	MATERIAL	FINISH
A	05FEB2009	MJS/	INITIAL DRAWING RELEASE	LATCH ASSEMBLY	91-812-52	-	-
B	31AUG2009	MJS/	PRN: P2009-1029	HANDLE	-	304 CRES	PASSIVATE
				KEEPER	-	304 CRES	PASSIVATE
				YOKE	-	304 CRES	PASSIVATE
				PIVOT PIN	-	303 CRES	PASSIVATE
				RIVET	-	303 CRES	PASSIVATE
				MOUNTING BRACKET	-	304 CRES	PASSIVATE
				HOOK ASSEMBLY	-	HOOK - 304 CRES WELD SCREW - 18-8 STAINLESS	PASSIVATE
				RETAINER	-	304 CRES	PASSIVATE
				SQUARE NUT	-	18-8 STAINLESS	PASSIVATE
				SLOTTED SPRING PIN	-	302 STAINLESS	

MILLIMETERSALL DIMENSIONS WITHOUT
TOLERANCES ARE FOR
REFERENCE ONLY.
THIRD ANGLE PROJECTION
A4
PAPER
SIZE

NOTES:

1. MAXIMUM LOAD = 1000 LBS
2. THE LATCH HANDLE SHOULD ROTATE WITHOUT
BINDING AFTER ASSEMBLY INSTALLATION

MOUNTING BRACKETLATCHED POSITIONLATCHED POSITIONKEEPER