

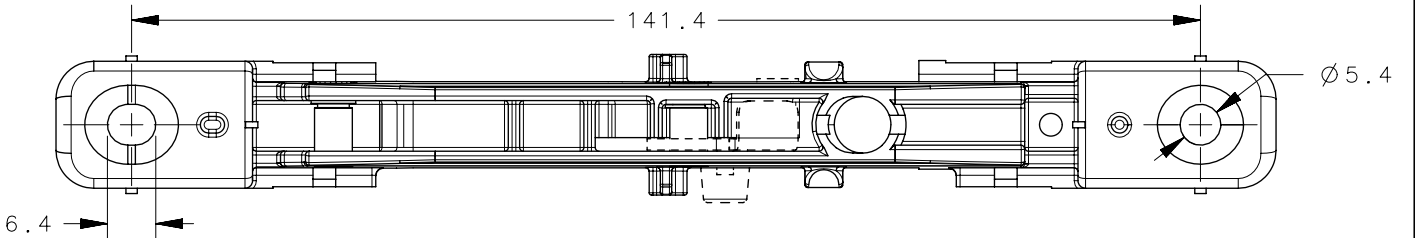
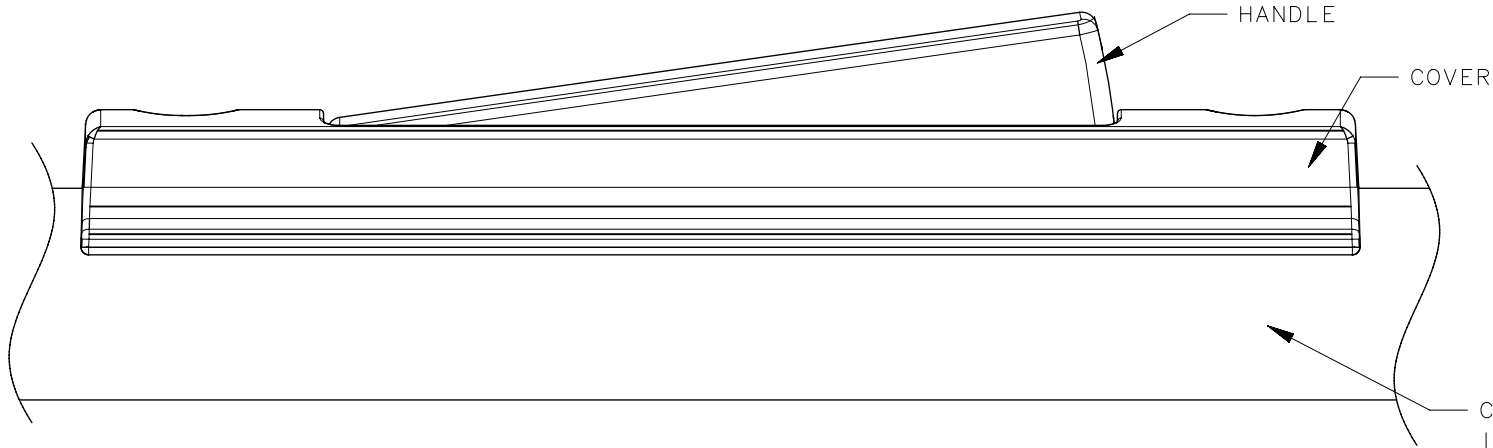
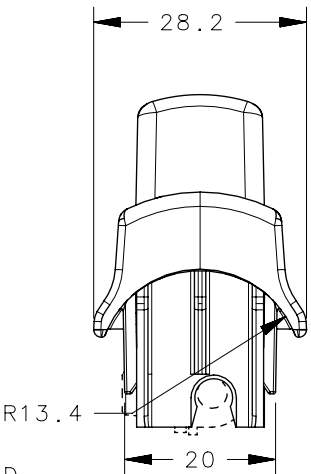
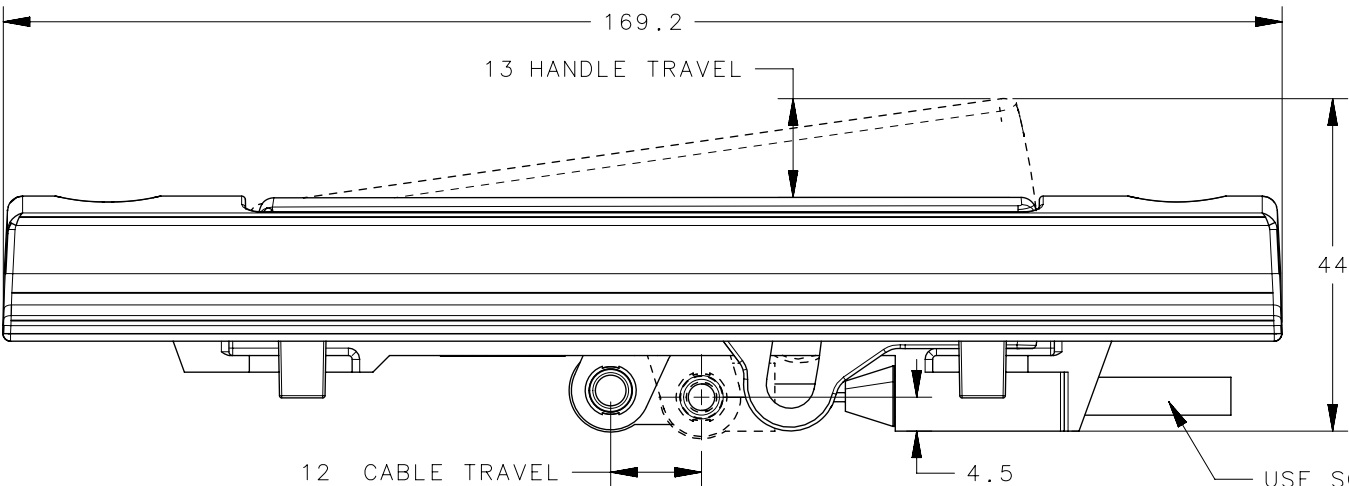


REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
B	15JUL2015	IW/LC	PRN: P2015-1399

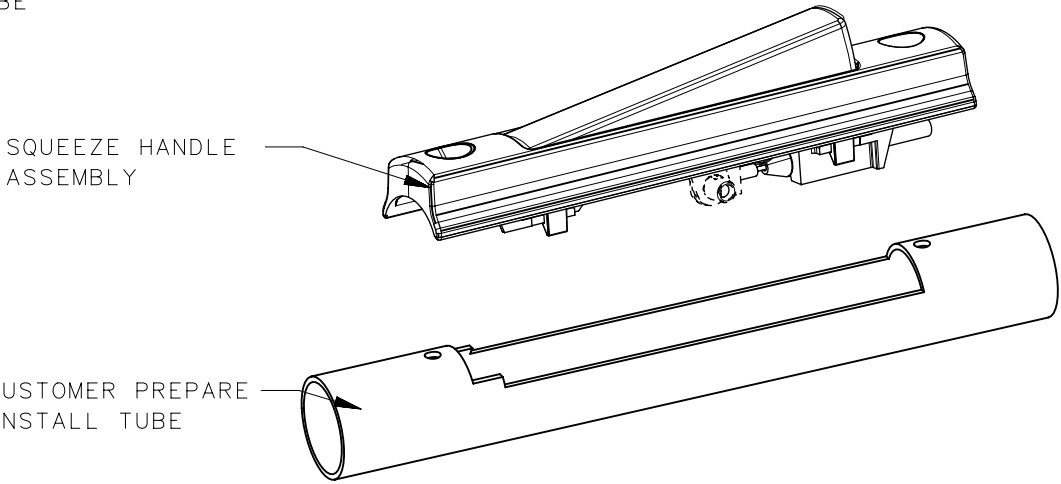


VIEW SHOWN WITHOUT COVER

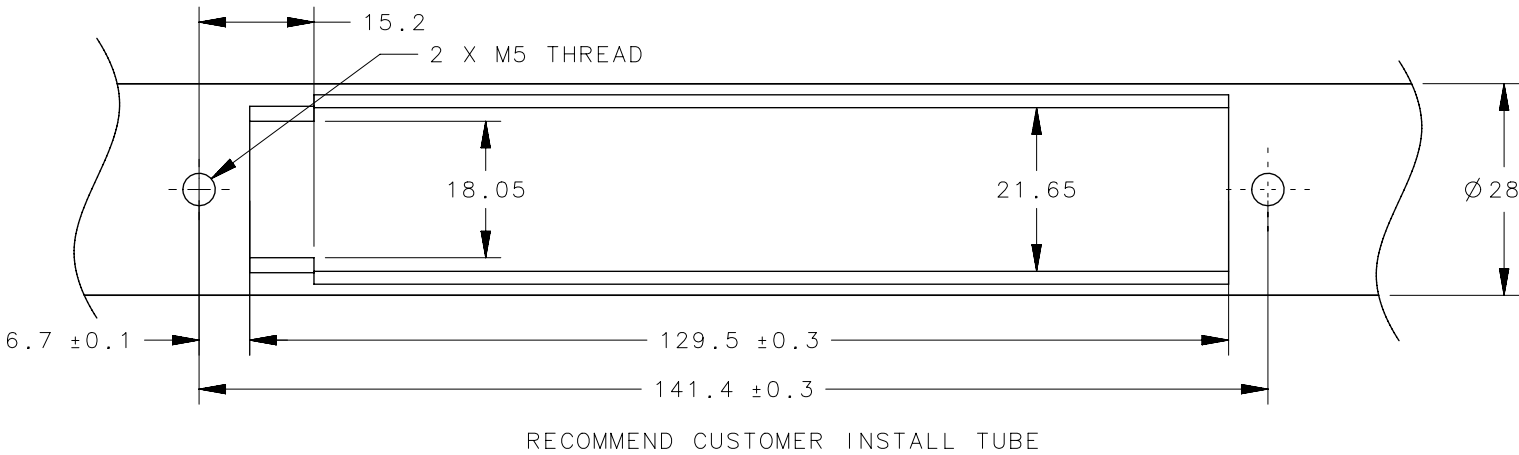


- NOTES:
1. PREPARE TUBE AS SHOWN.
 2. RECOMMENDED SCREW INSTALL TORQUE: 2 N.m MAX.

	SPRING	1	STAINLESS STEEL	
	N/A	1	ACETAL	
	LEVER	1	NYLON	
	PIN	2	STAINLESS STEEL	
	CLIP	1	STEEL	
	COVER	1	NYLON	
	HOUSING	1	NYLON	
	LEVER	1	STEEL	
AC-50-101-11	ASSEMBLY	1	-	
PART NUMBER	TYPE OF COMPONENT	QTY	MATERIAL	GENERAL NOTES

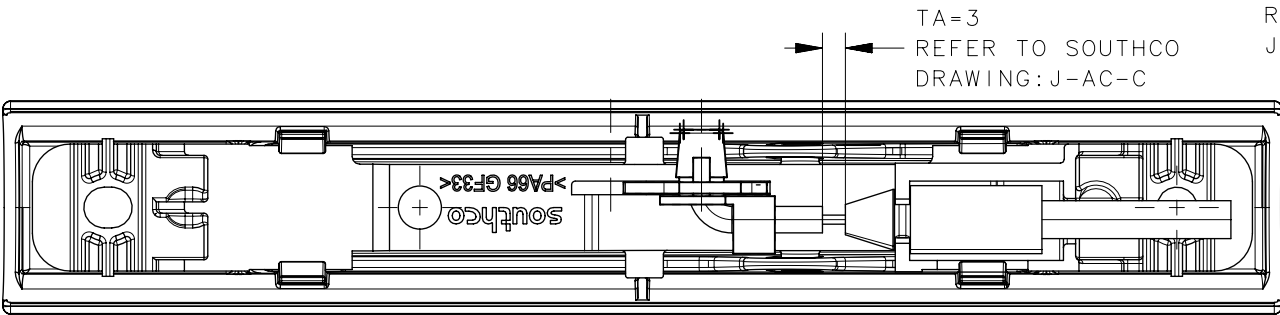

USE SOUTHCO CABLE END FITTING TYPE B[L TYPE] (CABLE SOLD SEPARATELY) REFER TO SOUTHCO DRAWING J-AC-C FOR CABLE SELECTION GUIDE.

	THIRD ANGLE PROJECTION				southco® CONNECT • CREATE • INNOVATE		
	MILLIMETERS [IN]						
	TOLERANCES UNLESS OTHERWISE NOTED		DESCRIPTION				
	ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.		SQUEEZE HANDLE ASSEMBLY				
VOLUME			SIZE B	SYSTEM NX	DWG NO. J-AC-50		
PROPRIETARY ITEM EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.			DRAWN BY IW/LC			DATE 18AUG2014	SCALE 1:1
	PER ASME Y14.5M-1994						