

Stainless steel telescopic slides for side mounting, over-extension, load capacity up to 90 kg

Item description/product images



Description

Material:

Rail stainless steel 1.4301.

Ball cage stainless steel 1.4301.

Balls stainless steel 1.4034.

Version:

Slides bright.

Ball cages bright.

Balls bright.

Note for ordering:

Sold in pairs.

Note:

On telescopic slides with over-extension, the travel is greater than the installed length. When the release lever is actuated, the drawer can be taken out easily and separated from the guide.

The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The load capacity specified is calculated with a slide spacing of 450 mm and is based on the maximum value with 50,000 cycles.


Not suitable for horizontal mounting.

Temperature range:

-20 °C - +70 °C.

Stainless steel telescopic slides for side mounting, over-extension, load capacity up to 90 kg

Drawings

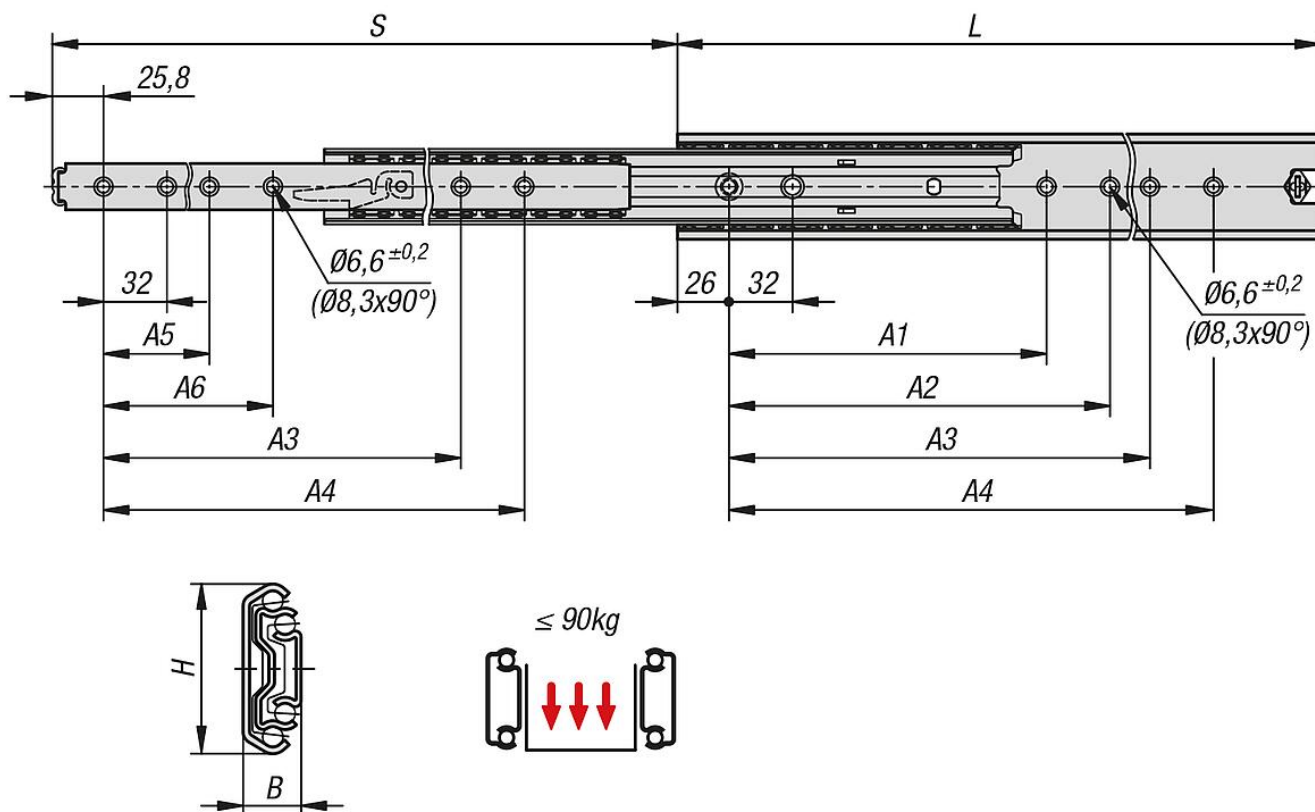

Overview of items

Stainless steel telescopic slides for side mounting, over-extension, load capacity up to 90 kg

Order No.	A	A1	A2	A3	A4	A5	A6	B	H	Travel S	L	Fp= load capacity/pair 50,000 cycl.	Assembly	Product type	Packaging type
K2092.0300	26	-	-	192	224	-	-	19,1	53	323	300	90	side mounting	standard	1 piece = 1 pair
K2092.0350	26	-	-	224	256	-	-	19,1	53	373	350	90	side mounting	standard	1 piece = 1 pair
K2092.0400	26	160	192	288	320	128	160	19,1	53	423	400	90	side mounting	standard	1 piece = 1 pair
K2092.0450	26	192	224	352	384	160	192	19,1	53	473	450	90	side mounting	standard	1 piece = 1 pair
K2092.0500	26	192	224	384	416	192	224	19,1	53	523	500	90	side mounting	standard	1 piece = 1 pair
K2092.0550	26	256	288	448	480	224	256	19,1	53	573	550	90	side mounting	standard	1 piece = 1 pair
K2092.0600	26	256	288	480	512	256	288	19,1	53	623	600	90	side mounting	standard	1 piece = 1 pair
K2092.0700	26	288	320	576	608	288	320	19,1	53	723	700	90	side mounting	standard	1 piece = 1 pair
K2092.0790	26	352	384	672	704	320	352	19,1	53	803	790	90	side mounting	standard	1 piece = 1 pair