



ULTRA HEAVY DUTY LEVELLING GLIDE SDY-TRSB

LOAD CAPACITY 63700 N~107800 N **SUS**

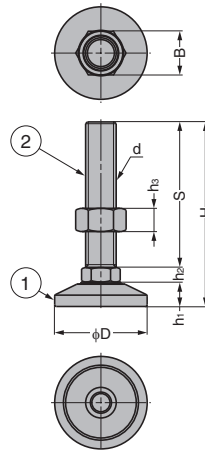

[Application Example]



- Levelling glide subject to galling preventive treatment.
- Threaded bolt with trapezoidal screw thread. Tr42-Tr60 available.
- With bearing to provide easy and smooth level adjustment.
- Steel models also available by made to order (minimum order 10 pcs).

[Remarks]

● Use in combination with the base (sold separately).

[Sold Separately]

● Glide base SDY-L **1**

	P	d ₁	d ₂	h
Tr42	6	34.3	41.8	3.75
Tr52	7	43.1	51.8	4.35
Tr60	8	49.9	59.8	4.95

d₁ : Minimum diameter
d₂ : Maximum diameter
h : Thread height

No.	Part Name	Material	Finish
①	Body	Stainless Steel (SUS304)	Polished
②	Threaded Bolt		

RoHS	CAD	Item Code	Item Name	d	D	H	h ₁	h ₂	h ₃	S	B	Load Capacity N/pc	Load Capacity kgf/pc	Weight (kg)	Box (pcs)	Carton (pcs)
RoHS	3D	200-024-378	SDY-TRSB-42-200	Tr42	127	253.5	33.5	20	32	200	60	63700	6500	4.82	1	-
RoHS	3D	200-024-379	SDY-TRSB-42-300	Tr42	127	353.5	33.5	20	32	300	60	63700	6500	5.72	1	-
RoHS	3D	200-024-380	SDY-TRSB-52-200	Tr52	137	260.5	38.5	22	42	200	80	88200	9000	7.68	1	-
RoHS	3D	200-024-381	SDY-TRSB-52-300	Tr52	137	360.5	38.5	22	42	300	80	88200	9000	9.08	1	-
RoHS	3D	200-024-382	SDY-TRSB-60-200	Tr60	147	266.5	42.5	24	48	200	90	107800	11000	10.34	1	-
RoHS	3D	200-024-383	SDY-TRSB-60-300	Tr60	147	366.5	42.5	24	48	300	90	107800	11000	12.14	1	-

Refer to **1** : P.806


GLIDE BASE SDY-L




- For SDY-TRSB **1**, SDY-TRAS **2** and SDY-MS **3** (for M42).
- Metric screw thread and trapezoidal screw thread available.
- Steel models (nickel plating) also available by made to order (minimum order 10 pcs).

[Recommended Screws]

● Hexagon socket head cap screw M8

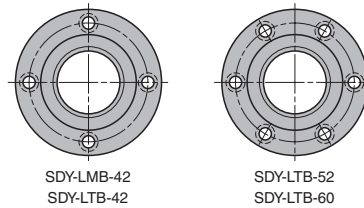

[Installation]



RoHS	CAD	Item Code	Item Name	Material	Finish	d	D	D ₁	D ₂	H	h ₁	h ₂	A	Weight (kg)	Box (pcs)	Carton (pcs)	
RoHS	3D	200-024-353	SDY-LMB-42	Brass	Nickel	Metric Screw Thread (M42)	97	77	60	40	22	18	9.4	1.2	2	-	
RoHS	3D	200-024-354	★SDY-LMB-52			Metric Screw Thread (M52)	107	87	70	50	30	20	11.4	1.64	1	-	-
RoHS	3D	200-024-355	★SDY-LMB-60			Metric Screw Thread (M60)	117	97	80	60	40	20	11.4	2.15	1	-	-
RoHS	3D	200-024-356	SDY-LTB-42			Trapezoidal Screw Thread (Tr42×6)	97	77	60	50	32	18	9.4	1.33	1	-	-
RoHS	3D	200-024-357	SDY-LTB-52			Trapezoidal Screw Thread (Tr52×7)	107	87	70	60	40	20	11.4	1.8	1	-	-
RoHS	3D	200-024-358	SDY-LTB-60			Trapezoidal Screw Thread (Tr60×8)	117	97	80	70	50	20	11.4	2.36	1	-	-

★Discontinued Refer to **1** : P.806, **2** : P.810, **3** : P.807