LIFT-OFF HINGE HG-KM

SUS

[Installation]



- Ultra thick hinge for ultra heavy doors.
- Thrust bearing in movable part provides smooth movement.

[Applications]

- Large doors, gate doors, and other rotation mechanism of heavy objects, etc.

[Remarks]

- Screws not included.
- Load capacity is the value when using two hinges. For calculation conditions, please refer to INDEX 1 .

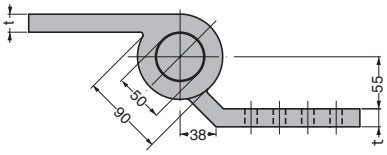

HG-KM19-275, HG-KM20-250





HG-KM12-268

RoHS	CAD	Item Code	Item Name	Old Item Name	Type	Material	Finish	H	H1	H2	P1	P2	P3	P4	A	t	Load Capacity N/2 pcs	Load Capacity kgf/2 pcs	Weight (kg)	Box (pcs)
G	2D 3D	170-090-452	HG-KM12-268R	HG-KM12-268	Right-handed	Stainless Steel (SUS304)	Satin	268	125	18	27.5	35	35	25	5	12	2940	300	8.3	1
G	2D 3D	170-044-760	HG-KM12-268L	—	Left-handed															1
G	2D 3D	170-090-453	HG-KM19-275R	HG-KM19-275	Right-handed			275		25			30		10	19	4810	490	19.8	1
G	2D 3D	170-044-761	HG-KM19-275L	—	Left-handed															1

Refer to 1 : P.15

LIFT-OFF HINGE HG-KH

SUS

[Installation]



- Ultra thick hinge for ultra heavy doors.
- Thrust bearing in movable part provides smooth movement.

[Applications]

- Large doors, gate doors, and other rotation mechanism of heavy objects, etc.

[Remarks]

- Screws not included.
- Load capacity is the value when using two hinges. For calculation conditions, please refer to INDEX 1 .

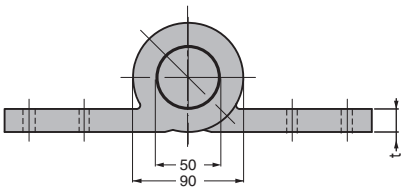

HG-KH19-275, HG-KH20-250

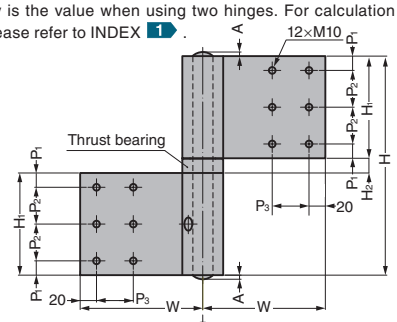



HG-KH12-268

RoHS	CAD	Item Code	Item Name	Old Item Name	Type	Material	Finish	H	H1	H2	W	P1	P2	P3	A	t	Load Capacity N/2 pcs	Load Capacity kgf/2 pcs	Weight (kg)	Box (pcs)
G	2D 3D	170-090-454	HG-KH12-268R	HG-KH12-268	Right-handed	Stainless Steel (SUS304)	Satin	268	125	18	150	17.5	45	45	5	12	2940	300	7.4	1
G	2D 3D	170-044-762	HG-KH12-268L	—	Left-handed															1
G	2D 3D	170-090-455	HG-KH19-275R	HG-KH19-275	Right-handed			275		25					10	19	4810	490	17.2	1
G	2D 3D	170-044-763	HG-KH19-275L	—	Left-handed															1

Refer to 1 : P.15