

Stainless steel telescopic slides for side mounting, full extension, load capacity up to 80 kg

Item description/product images



Description

Product description:

The slides are ideal for kitchen ovens and are suitable for a temperature range of -20 °C to +300 °C. They are suitable for a variety of environments, including industrial, commercial, domestic and outdoor. They combine functionality with high quality, making them perfect for demanding applications.

Material:

Rail stainless steel 1.4301.

Ball cage stainless steel 1.4301.

Balls stainless steel 1.4034.

Version:

Slides bright.

Ball cages bright.

Balls bright.

Note for ordering:

Sold in pairs.

Note:

On telescopic slides with full extension, the travel is similar to the installed length, which ensures greater comfort and accessibility. The dynamic load capacity of the telescopic slides indicates the maximum load rating of a vertically mounted slide pair when the entire extension length is used. The load capacity specified is calculated with a slide spacing of 450 mm and is based on the maximum value with 10,000 cycles.

When mounted horizontally, the load capacity is 75 % less.

The head height of the fastening screws should not exceed 2,5 mm and have a head diameter of max. 9,6 mm, otherwise there is a risk of collision with other parts of the slide.

Temperature range:


-20 °C to +300 °C.

Accessory:

K2096 Mounting bracket, stainless steel, for telescopic slides.

Stainless steel telescopic slides for side mounting, full extension, load capacity up to 80 kg

Drawings

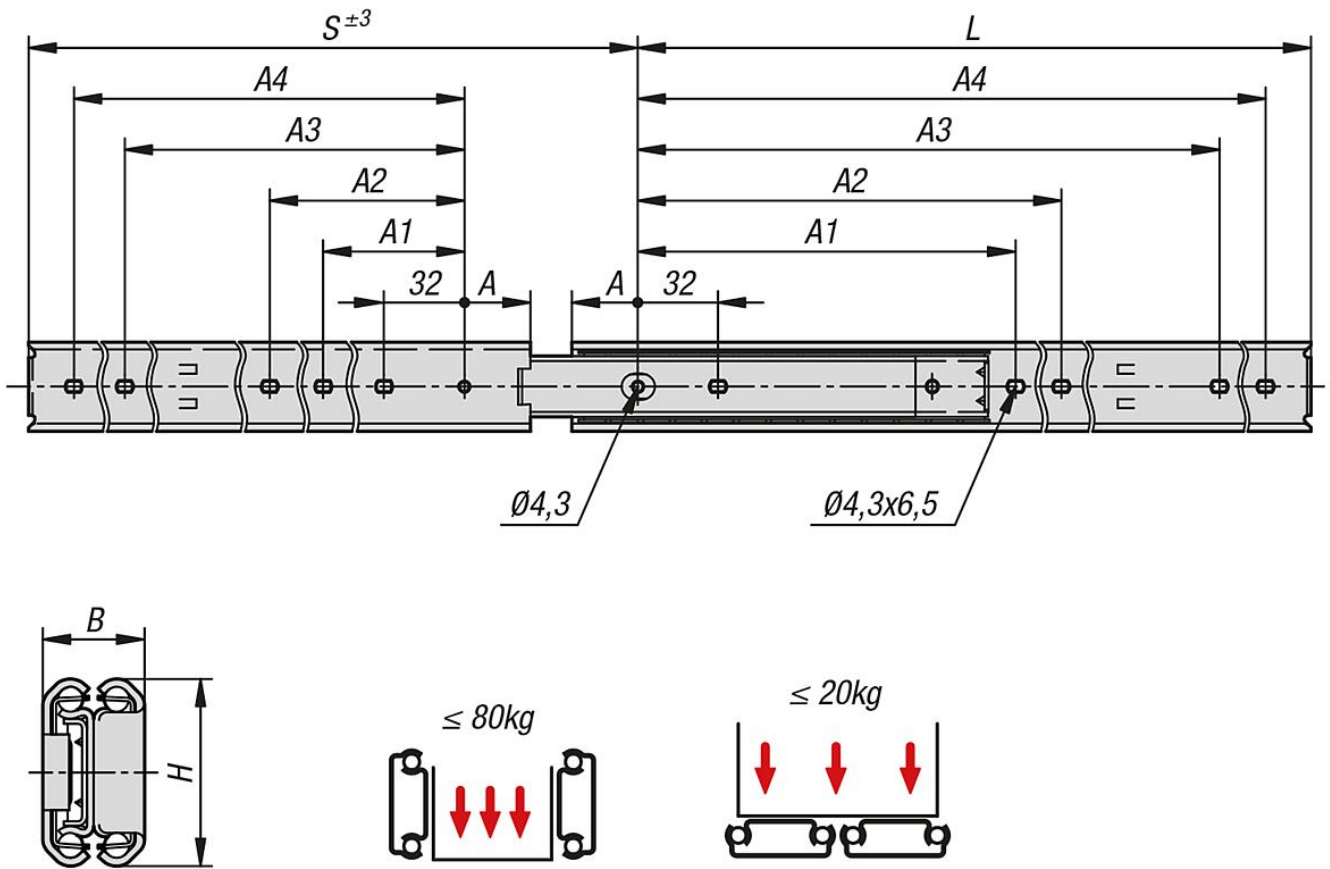

Overview of items

Stainless steel telescopic slides for side mounting, full extension, load capacity up to 80 kg

Order No.	Assembly	Product type	Fp1= load capacity/pair 10.000 cycl.	Packaging type
K2367.0300	side mounting	standard	65	1 piece = 1 pair
K2367.0350	side mounting	standard	70	1 piece = 1 pair
K2367.0400	side mounting	standard	75	1 piece = 1 pair
K2367.0450	side mounting	standard	80	1 piece = 1 pair
K2367.0500	side mounting	standard	75	1 piece = 1 pair
K2367.0550	side mounting	standard	70	1 piece = 1 pair
K2367.0600	side mounting	standard	65	1 piece = 1 pair
K2367.0650	side mounting	standard	60	1 piece = 1 pair
K2367.0700	side mounting	standard	55	1 piece = 1 pair

Order No.	A	A1	A2	A3	A4	B	H	Travel S	L
K2367.0300	26	-	-	224	256	19,1	35,3	317,4	300
K2367.0350	26	-	-	256	288	19,1	35,3	366,6	350
K2367.0400	26	-	192	320	352	19,1	35,3	415,8	400
K2367.0450	26	-	224	352	384	19,1	35,3	465	450
K2367.0500	26	256	288	416	448	19,1	35,3	514,2	500
K2367.0550	26	288	320	480	512	19,1	35,3	563,4	550
K2367.0600	26	320	352	512	544	19,1	35,3	612,6	600
K2367.0650	26	320	352	576	608	19,1	35,3	661,8	650
K2367.0700	26	352	384	608	640	19,1	35,3	711	700

Stainless steel telescopic slides for side mounting, full extension, load capacity up to 80 kg

Overview of items

