

Rubber buffers

conical



Material:

Metal parts steel, grade 5.6.
Elastomer natural rubber, medium hardness, Shore 55A.

Version:

Steel electro zinc-plated.

Sample order:

nIm 26112-02501755

Note:


Rubber buffers are robust and effective elastic cushioning elements and shock absorbers. These buffers are ideal for elastic travel limitation and cushioning knocks by mobile and immobile aggregates and machines and as use as door stops.

Temperature range:

-30 °C to +80 °C

On request:

Other Shore grades.

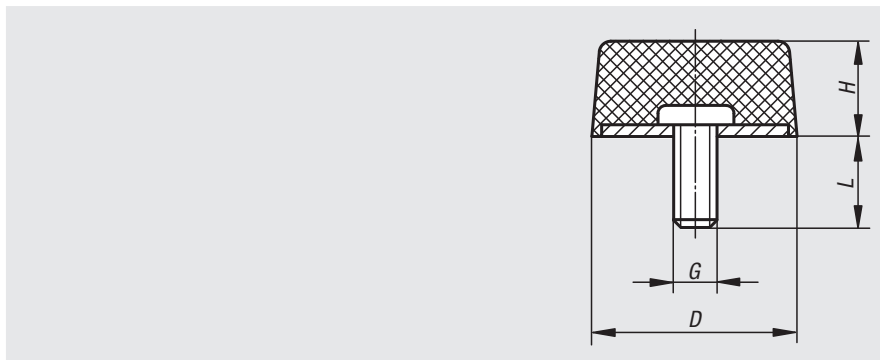

Order No.	D	H	G	L	Spring stiffness N/mm	Load N
26112-02501755	25	17	M6	18	119	678
26112-05001855	50	18	M10	28	670	3600

Rubber buffers

spherical



Material:

Metal parts steel, grade 5.6.
Elastomer natural rubber, medium hardness, Shore 55A.

Version:

Steel electro zinc-plated.

Sample order:

nIm 26115-05003555

Note:


Rubber buffers are robust and effective elastic cushioning elements and shock absorbers. These buffers are ideal for elastic travel limitation and cushioning knocks by mobile and immobile aggregates and machines and as use as door stops.

Temperature range:

-30 °C to +80 °C

On request:

Other Shore grades.

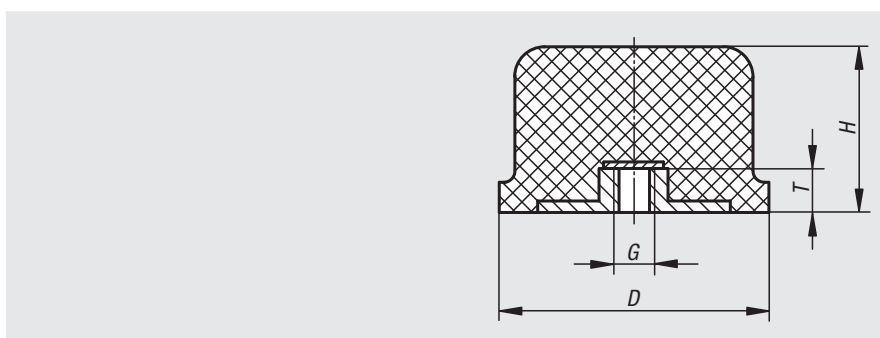

Order No.	D	H	G	T	Spring stiffness N/mm	Load N
26115-05003555	50	35	M10	10	120	3000
26115-08006055	80	60	M12	12	150	11000
26115-12509055	125	93	M16	16	200	20000