


Bodenelemente *Floor Elements*Stellfüße *Leveling Feet*Feste Stellfüße *Pivot Feet*

## GEWINDESTANGE FÜR FESTE STELLFÜßE

## THREADED ROD FOR PIVOT FEET

<b>Ausführung</b>	Edelstahl	<b>Model</b>	Stainless Steel
<b>Beschreibung</b>	Gewindestange für feste, nivellierbare Stellfüße	<b>Description</b>	Threaded rod for pivot leveling feet
<b>Material</b>	Edelstahl 1.4306	<b>Material</b>	Stainless steel SS309
<b>Verbindung</b>	Schwenkbereich $\pm 4^\circ$	<b>Screw joint</b>	Swiveling range $\pm 4^\circ$
<b>Liefereinheit</b>	10 Stück	<b>Pack Quantity</b>	10 pieces
<b>Extras</b>	weitere Längen und Größen auf Anfrage	<b>Specials</b>	Other lengths and sizes on request
<b>Hinweis</b>	*1. für feste Stellfüße: Lieferung inkl. Montagesatz 098XAES03 *2. für feste Schwerlastfüße: Lieferung inkl. Montagesatz 098XAKE	<b>Tip</b>	*1. For pivot feet: Assembly set 098XAES03 included *2. For heavy-duty pivot feet: Assembly set or 098XAKE included

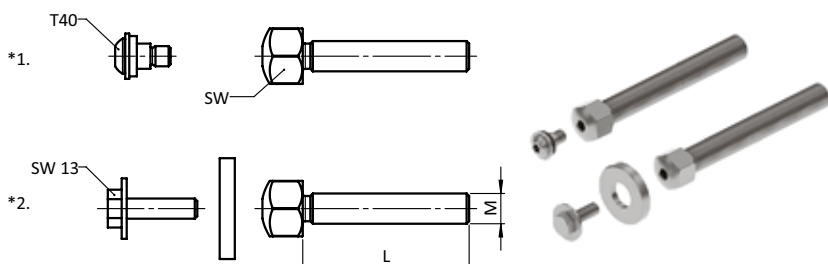

Gewindestange für feste Stellfüße Threaded Rod for Pivot Feet	M × L [mm]	SW [mm]	Tragkraft [kg] Max. Load [kg]	Gewicht [g] Weight [g]	Teil-Nr. Part #
Edelstahl <i>Stainless steel</i>	M12 × 66	22	770	70.0	<a href="#">098AM12066E</a>
	M12 × 100	22	770	94.0	<a href="#">098AM12100E</a>
	M12 × 125	22	770	127.0	<a href="#">098AM12125E</a>
	M12 × 150	22	770	130.0	<a href="#">098AM12150E</a>
	M16 × 66	22	1450	112.0	<a href="#">098AM16066E</a>
	M16 × 100	22	1450	152.0	<a href="#">098AM16100E</a>
	M16 × 125	22	1450	173.0	<a href="#">098AM16125E</a>
	M16 × 150	22	1450	235.0	<a href="#">098AM16150E</a>
	M16 × 200	22	1450	315.0	<a href="#">098AM16200E</a>
	M16 × 250	22	1450	394.0	<a href="#">098AM16250E</a>
	M20 × 100	22	2430	237.0	<a href="#">098AM20100E</a>
	M20 × 125	22	2430	255.0	<a href="#">098AM20125E</a>
	M20 × 150	22	2430	341.0	<a href="#">098AM20150E</a>
	M20 × 200	22	2430	447.0	<a href="#">098AM20200E</a>
	M20 × 250	22	2430	542.0	<a href="#">098AM20250E</a>
	M24 × 100	24	3610	342.0	<a href="#">098AM24100E</a>
	M24 × 150	24	3610	477.0	<a href="#">098AM24150E</a>
	M24 × 200	24	3610	631.0	<a href="#">098AM24200E</a>
	M24 × 300	24	3610	947.0	<a href="#">098AM24300E</a>
	M30 × 100	24	5770	512.0	<a href="#">098AM30100E</a>
	M30 × 150	24	5770	744.0	<a href="#">098AM30150E</a>
	M30 × 200	24	5770	976.0	<a href="#">098AM30200E</a>
	M30 × 250	24	5770	1115.0	<a href="#">098AM30250E</a>
	M30 × 300	24	5770	1420.0	<a href="#">098AM30300E</a>