

## NON-MAGNETIC TOUCH LATCH PR3PK Snap-in Installation





- No handle needed, just push to open/close.

### [Remarks]

- Counter plate not included. Please prepare the counter plate, for example by forming on the door side.

### [Cut Out Dimensions]

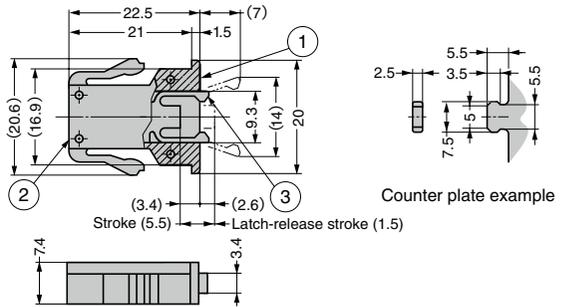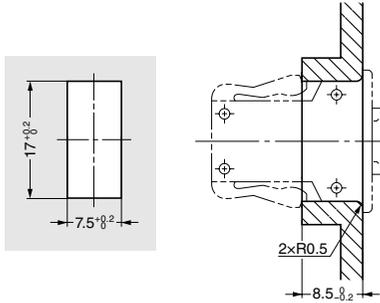

No.	Part Name	Material	Colour
①	Body	ABS	Black
②	Base		Clear
③	Arm	POM	Black

RoHS	CAD	Item Code	Item Name	Weight (g)	Box (pcs)	Carton (pcs)
		140-050-239	PR3PK	2.5	400	3200

## MAGNETIC TOUCH LATCH ML-120



- Large stroke. Can also be used for heavy doors or large doors (tested with W600 x H1800 x t30 door).
- Lightly push to open the door.
- When closing, magnet will catch the door by lightly pushing.
- Counter plate is movable.
- For overlay door, leave a space between side board and door as shown below.


### [Remarks]

- Be sure to read the "Cautions"
- Please use hinges without catch. (Or hinges with catch may cause malfunction).
- Do not use as a door stopper. Excessive force may cause damage.
- Pay attention to not pinching fingers when using with a small door.


### [Parts Included]

- Counter plate
- Countersunk head tapping screw 4 x 16

### [Inset door]



### [Overlay door]



\* without including thickness of mounting plate.

To ensure a push-in allowance of 3.5mm or above in the latch part as shown, please leave a clearance C between door and side board. (Sponge rubber, PVC packing may be used in the gap for good appearance and dust removal).

RoHS	CAD	Item Code	Item Name	Colour	Magnetic Force N	Magnetic Force kgf	Weight (g)	Box (pcs)	Carton (pcs)	No.	Part Name	Material	Finish / Colour
		140-050-338	ML-120BR	Brown	23.5	2.4	53	20	240	①	Body	ABS	Brown, White
		140-050-337	ML-120W	White						②	Yoke	Steel (SPCC)	Coloured Zinc Chromate
										③	Counter Plate	ABS/Steel (SPCC)	Brown, White/Zinc Chromate

Refer to : P.607