

# LEVELLING GLIDE ADCR

**LOAD CAPACITY** 6664~14112 N



- Bottom cover made of nitrile rubber to prevent from skidding and scratching the floor.
- Cross-recessed bottom allows easy installation with pneumatic screwdriver.

**[Others]**


- For special size, please contact local representatives.

**[Remarks]**


- Do not move horizontally under load. Cover may come off or wear out.

**[Sold Separately]**

- Washer for Levelling glide ADZS (SUS) **1**
- Washer for Levelling glide ADZ (steel) **2**



**[Application Example]**

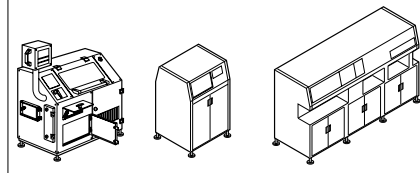

No.	Part Name	Material	Finish/Colour
①	Threaded Bolt	Steel (SWRCH)	Clear Zinc Chromate
②	Body	Steel (SS)	(Trivalent)
③	Cover	Nitrile Rubber (NBR)	Black

RoHS	CAD	Item Code	Item Name	H	S	B	d	Load Capacity N/pc	Load Capacity kgf/pc	Weight (g)	Box (pcs)	Carton (pcs)
		200-140-508	ADCR60-12-50	80	50	19	M12×1.75	6664	680	332	50	-
		200-140-072	ADCR60-20-180	215	180	30	M20×2.5	14112	1440	768	25	-

Refer to **1** **2** : P.830

# LEVELLING GLIDE ADCS, ADC

**LOAD CAPACITY** 2940~8624 N **SUS**



- ADC (Steel): Cross-recessed bottom allows easy installation.

**[ADCS] Stainless Steel**

No.	Part Name	Material	Finish
①	Body	Stainless Steel (SUS304)	Polished
②	Threaded Bolt		

RoHS	CAD	Item Code	Item Name	H	S	B	d	Load Capacity N/pc	Load Capacity kgf/pc	Weight (g)	Box (pcs)	Carton (pcs)
		200-141-220	ADCS60-12-120	145	120	19	M12	2940	300	365	60	-
		200-141-222	ADCS60-16-100	127	100	24	M16	5488	560	440	50	-
		200-141-223	ADCS60-16-130	157	130					480	50	-
		200-141-225	ADCS60-16-180	207	180	30	M20	8624	880	550	35	-
		200-141-226	ADCS60-20-100	130	100					590	40	-
		200-141-227	ADCS60-20-130	160	130	30	M20	8624	880	650	40	-
		200-141-229	ADCS60-20-180	210	180					750	30	-

**[ADC] Steel**

No.	Part Name	Material	Finish
①	Body	Steel (SS)	Clear Zinc Chromate (Trivalent)
②	Threaded Bolt	Steel (SWRCH)	

RoHS	CAD	Item Code	Item Name	H	S	B	d	Load Capacity N/pc	Load Capacity kgf/pc	Weight (g)	Box (pcs)	Carton (pcs)
		200-141-533	ADC60-12-120	145	120	19	M12	2940	300	355	60	-
		200-141-535	ADC60-16-100	127	100	24	M16	5488	560	440	50	-
		200-141-536	ADC60-16-130	157	130					480	50	-
		200-141-538	ADC60-16-180	207	180	30	M20	8624	880	540	35	-
		200-141-540	ADC60-20-100	130	100					580	40	-
		200-141-541	ADC60-20-130	160	130	30	M20	8624	880	640	40	-
		200-141-542	ADC60-20-150	180	150					680	35	-
		200-140-071	ADC60-20-180	210	180	740	30	-				

