

FULL EXTENSION SLIDE



SNS35D




Features

- Full extension (3 members).
- Non-handed.

Recommended Screws

M4 pan head tapping screw

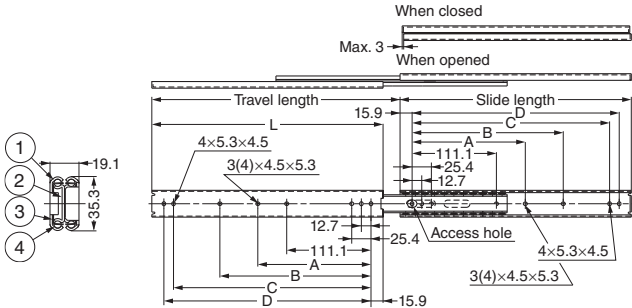

No.	Part Name	Material	Finish
①	Outer Rail	Stainless Steel (SUS304)	Plain
②	Inner Rail	Stainless Steel (SUS304)	Plain
③	Retainer	Stainless Steel (SUS304)	Plain
④	Balls	Stainless Steel (SUS440)	-


Sold by piece.

Item Code	Item Name	Slide Length	Travel Length	A	B	C	D	Load Capacity N	Load Capacity kgf	Weight	Box
190-110-200	SNS35D-30	304.8	327.2	-	149.2	260.3	273	588 N/pair	60 kgf/pair	1.24 kg/pair	10 pcs
190-110-201	SNS35D-35	355.6	377.9	-	200	311.1	323.8	579 N/pair	59 kgf/pair	1.44 kg/pair	10 pcs
190-110-202	SNS35D-40	406.4	428.7	-	250.8	361.9	374.6	559 N/pair	57 kgf/pair	1.64 kg/pair	10 pcs
190-110-203	SNS35D-45	457.2	479.5	212.7	301.6	412.7	425.4	549 N/pair	56 kgf/pair	1.84 kg/pair	10 pcs
190-110-204	SNS35D-50	508	530.3	238.1	352.4	463.5	476.2	530 N/pair	54 kgf/pair	2.05 kg/pair	10 pcs
190-110-205	SNS35D-55	558.8	580.3	263.5	403.2	514.3	527	500 N/pair	51 kgf/pair	2.25 kg/pair	10 pcs
190-110-206	SNS35D-60	609.6	631.9	288.9	454	565.1	577.8	481 N/pair	49 kgf/pair	2.45 kg/pair	10 pcs
190-110-207	SNS35D-65	660.4	682.7	314.3	504.8	615.9	628.6	461 N/pair	47 kgf/pair	2.65 kg/pair	10 pcs
190-110-208	SNS35D-70	711.2	733.5	339.7	555.6	666.7	679.4	441 N/pair	45 kgf/pair	2.85 kg/pair	10 pcs

FULL EXTENSION SLIDE




ESR4658

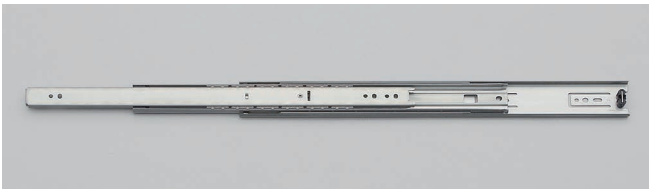

Features


- Full extension (3 members).
- With a bumper to avoid metal-to-metal noise at the end of the course.
- The drawer is detachable by lifting the lever.
- Non-handed.

Easy to Detach



Recommended Screws

- For wood: M4 tapping screw
- For steel: M4 screw

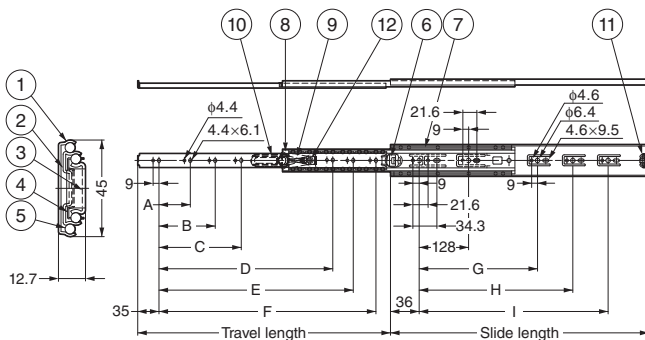

No.	Part Name	Material	Finish/Colour
①	Outer Rail	Stainless Steel (SUS304)	Plain
②	Intermediate Member	Stainless Steel (SUS304)	Plain
③	Inner Rail	Stainless Steel (SUS304)	Plain
④	Retainer	Stainless Steel (SUS304)	Plain
⑤	Balls	Stainless Steel (SUS304)	-
⑥	Rubbing Prevention Bumper	Polypropylene (PP)	Natural
⑦	Retainer	Polyethylene (PE)	Grey
⑧	Guide Block	Polyamide (PA)	Black
⑨	Lever 1	Polyacetal (POM)	Black
⑩	Lever 2	Polyamide (PA)	Black
⑪	Closing Catch Bumper	Polyurethane (PUR)	Black
⑫	Rivet	Stainless Steel (SUS302)	-

Sold in pairs (2 pcs).

Item Name	Slide Length	Travel Length	B	D	F	H	I	Load Capacity kgf	Weight	Box
190-110-706	ESR4658-14	350	356	-	-	292	224	490 N/pair	50 kgf/pair	1.09 kg/pair
190-110-707	ESR4658-16	400	406	-	320	342	224	470 N/pair	48 kgf/pair	1.13 kg/pair
190-110-708	ESR4658-18	450	457	128	-	392	224	441 N/pair	45 kgf/pair	1.28 kg/pair
190-110-709	ESR4658-20	500	508	128	352	442	224	421 N/pair	43 kgf/pair	1.42 kg/pair
190-110-710	ESR4658-22	550	559	128	-	492	224	402 N/pair	41 kgf/pair	1.57 kg/pair
190-110-711	ESR4658-24	600	610	128	-	542	224	382 N/pair	39 kgf/pair	1.71 kg/pair
190-110-712	ESR4658-26	650	660	128	224	592	224	353 N/pair	36 kgf/pair	1.86 kg/pair
190-110-713	ESR4658-28	700	711	128	224	642	224	314 N/pair	32 kgf/pair	2 kg/pair