
INSERT TORQUE HINGE HG-TIB10-2 With Bracket

Latest Information

Free Stop




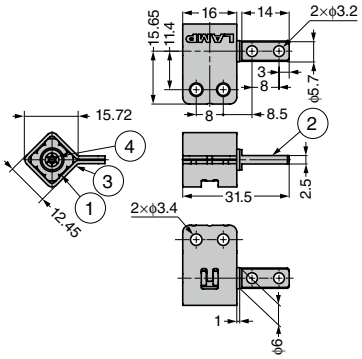

- Greaseless torque hinge.

Applications
- OA equipment, medical equipment, liquid crystal monitor

Remarks
- Please be sure to check the handling precautions 1.
- The HG-TI, a version without the bracket, is also available.



Includes a square-shaped bracket.

Selection Tool

Free stop

No.	Part Name	Material	Finish
①	Case	Polyacetal (POM)	–
②	Shaft	Stainless Steel (SUS303)	
③	Bracket	Stainless Steel (SUS304)	Barrel Polished
④	Push Nut		–

RoHS	Item Code	Item Name	Torque N·m	Torque kgf·cm	Opening Angle	Weight (g)
●	170-054-742	HG-TIB10-2	1.0±20%	10±20%	360°	12

Refer to 1: No.400 P.43

INSERT TORQUE HINGE HG-TI10-2

Latest Information

Free Stop





- Greaseless TORQUE HINGE.
- Insertable type for fitting into a pre-existing slot or housing.

Applications
- OA equipment, medical equipment, liquid crystal monitor

Remarks
- Please be sure to check the handling precautions 1.
- Mounting and machining diagrams are for reference only. Always check the installation by the customer, as adjustments to the machining dimensions may be necessary depending on the material, processing and method of use.
- The HG-TIB includes a square-shaped bracket is also available.

Cut Out Dimension



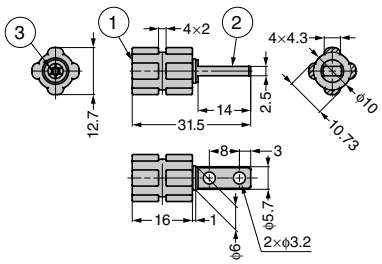

Selection Tool

Free stop

No.	Part Name	Material
①	Case	Polyacetal (POM)
②	Shaft	Stainless Steel (SUS303)
③	Push Nut	Stainless Steel (SUS304)

RoHS	Item Code	Item Name	Torque N·m	Torque kgf·cm	Opening Angle	Weight (g)
●	170-054-741	HG-TI10-2	1.0±20%	10±20%	360°	6

Refer to 1: No.400 P.43